


# Excel 24AWG 4 Core Belden Alternative Multicore Cable SCR LSF Eca Type 9534 500 m Grey

Part Code: 2404COFV-EX500

sales@excel-networking.com  
excel-networking.com

CIBSE TM65 Embodied Carbon: 116.554 kg CO2e

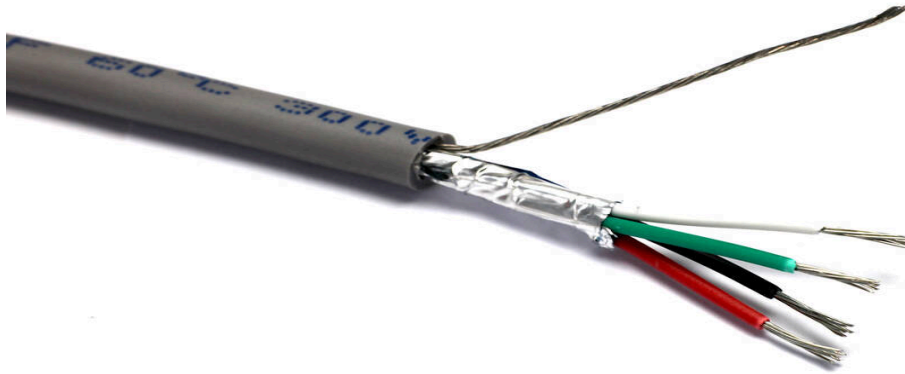

## Main Features

/ CIBSE TM65 Embodied Carbon: 116.554 kg CO2e

## Product Overview

Excel Multicore cables manufactured and designed for sound broadcast, audio and instrumentation offering an alternative Belden style cable, with tinned copper conductors. A four core cable with 24 AWG size conductors, single Drain Wire and overall foil shield in an LSF Grey Sheath rated as Euroclass Eca.

## Product Specifications

Feature	Values
Diameter of conductor	TC 0.20 ±0.008 x 7
Total number of cores	4

# Excel 24AWG 4 Core Belden Alternative Multicore Cable SCR LSF Eca Type 9534 500 m Grey

**Part Code: 2404COFV-EX500**

[sales@excel-networking.com](mailto:sales@excel-networking.com)  
[excel-networking.com](http://excel-networking.com)

Core identification	<b>black, White, Red, Green</b>
Overall screening	<b>Foil</b>
Outer sheath material	<b>LSZH</b>
Outer sheath colour	<b>Grey</b>
Flame retardant according to IEC 60332-1-2	<b>yes</b>
Halogen free (acc. IEC 60754-2)	<b>yes</b>
Reaction-to-fire class according to EN 13501-6	<b>Eca</b>
Outer diameter approx.	<b>4.60mm ± 0.2</b>
Min. permitted bending radius, stationary application/permanent installation	<b>40 mm</b>
Operating Temperature Range	<b>-20...70 °C</b>
Category	<b>Multicore Overall Screened</b>

## Part Code Table

Part Code	Description
2404COFV-EX500	<b>Excel 24AWG 4C M/Core LSF Eca Type 9534 500m G</b>