

Excel Enbeam OM4 Multimode Armoured CST Fibre
Optic Cable Loose Tube 4 Core 50/125 Cca Blue



Item Code: 274-204



✕ Duct grade - rodent resistant

✕ Sequentially metre marked

✕ UV Resistant

✕ Cut to length service

✕ 25 Year system warranty

✕ Euroclass Cca-s1a-d0-a1

Product Overview

Excel corrugated steel tape (CST) OM4 50/125µm armoured loose tube optical fibre cables have been designed specifically for applications requiring a high degree of mechanical protection. These compact, lightweight cables are extremely rugged, provide rodent resistance and are quick and easy to install.

The cables are constructed around a dry tube containing up to 24 colour coded 250µm buffered fibres, which is covered with E-glass strength members.

The print legend on the cable now includes information regarding the DOP number, Test and Classification of the cable for traceability.

Product Specifications

| Feature | Values |
|--|-------------------|
| Number of Cores | 4 |
| Type of tube | Loose tube |
| Number of fibres per tube | 4 |
| Fibre type | Multi mode 50/125 |
| Category | OM4 |
| Rodent resistant | yes |
| Outer sheath colour | Blue |
| Flame retardant according to IEC 60332-1-2 | yes |


Excel Enbeam OM4 Multimode Armoured CST Fibre
Optic Cable Loose Tube 4 Core 50/125 Cca Blue




Item Code: 274-204

| | |
|---|--------|
| Reaction-to-fire class according to EN 13501-6 | Cca |
| Smoke development class according to EN 13501-6 | s1a |
| Euro class flaming droplets/particles according to EN 13501-6 | d0 |
| Euro class acidity according to EN 13501-6 | a1 |
| Outer diameter approx. | 8.3 mm |

Cross-section diagram

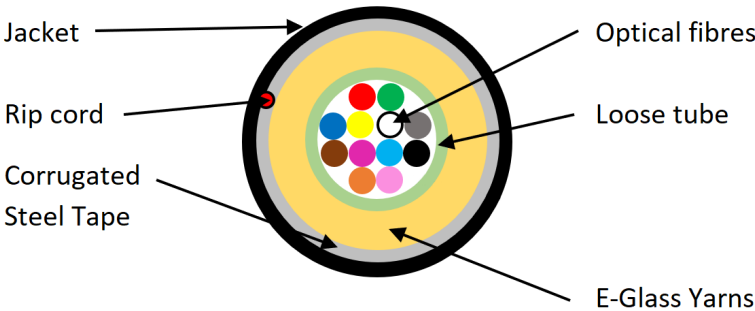

Colour coding (as per TIA-598-C)

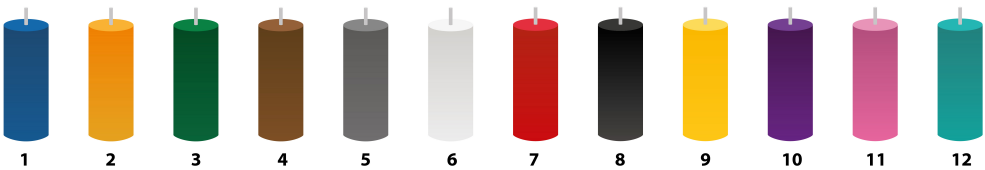

For fibre core counts above 12 the colour sequence is repeated with the addition of a mark every 70mm for cores 13-24 and two marks for 25-36 and so on.

Excel Enbeam OM4 Multimode Armoured CST Fibre Optic Cable Loose Tube 4 Core 50/125 Cca Blue



Item Code: 274-204

Cable specifications

| Features | | Values |
|----------------------------|--------------|----------------------|
| Tensile Strength | | 2000 N |
| Crush Resistance | | 3000 N/m |
| Torsion | | $\pm 180^\circ$ |
| Temperature performance | Installation | -30°C to +70°C |
| | Operation | -30°C to +70°C |
| | Storage | -30°C to +70°C |
| Loose tubes | Number | 1 |
| | Material | PBT (Dry tube) |
| Loose Tube ID/OD | 4-16 Cores | 2.4/3.2 \pm 0.3 mm |
| | 24 Cores | 3.2/4.0 \pm 0.3 mm |
| Peripheral Strength Member | | Glass Yarn |
| Armoring | Thickness | 0.150 mm |
| | Material | ECCS Tape |
| Outer Sheath | Thickness | 1.8 mm (Nominal) |
| | Material | LSZH |
| Ripcord | Number | 1 |
| | Material | Polyester |
| Overall Cable Diameter | 4-16 Cores | 9.0 \pm 0.5 mm |
| | 24 Cores | 9.5 \pm 0.5 mm |
| Cable Weight | 4-16 Cores | 100.0 \pm 10 kg/km |
| | 24 Cores | 115 \pm 10 kg/km |
| Bending Radius | Short term | 20 x Diameter |
| | Long term | 10 x Diameter |

Excel Enbeam OM4 Multimode Armoured CST Fibre Optic Cable Loose Tube 4 Core 50/125 Cca Blue



Item Code: 274-204

Fibre specifications

| Features | | OM1 | OM2 | OM3 | OM4 |
|-----------------------------------|----------|---------------|--------------|---------------|---------------|
| Attenuation | @850 nm | ≤ 3.0 dB/km | ≤ 2.7 dB/km | ≤ 2.7 dB/km | ≤ 2.7 dB/km |
| | @1300 nm | ≤ 1.0 dB/km | ≤ 0.8 dB/km | ≤ 0.8 dB/km | ≤ 0.8 dB/km |
| Bandwidth | @850 nm | ≥ 200 MHz.km | ≥ 500 MHz.km | ≥ 1500 MHz.km | ≥ 3500 MHz.km |
| | @1300 nm | ≥ 600 MHz.km | ≥ 550 MHz.km | ≥ 500 MHz.km | ≥ 500 MHz.km |
| Core Diameter | | 62.5 ± 2.5 µm | 50 ± 2.5 µm | 50 ± 2.5 µm | 50 ± 2.5 µm |
| Core Cladding Concentricity Error | | ≤ 1 µm | ≤ 1 µm | ≤ 1 µm | ≤ 1µm |
| Cladding Diameter | | 125 ± 1 µm | 125 ± 1 µm | 125 ± 1 µm | 125 ± 1 µm |
| Cladding Non-circularity | | ≤ 1 % | ≤ 1 % | ≤ 1 % | ≤ 1 % |
| Coating Diameter (Coloured) | | 250 ± 15 µm | 250 ± 15 µm | 250 ± 15 µm | 250 ± 15 µm |

Standards

| Applicable Standard | Subject |
|--------------------------|--|
| IEC 60332-1-2:2004 | Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame |
| IEC 60754-2:2011 | Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity |
| IEC 61034-2:2005+A1:2013 | Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements |
| IEC 60793-1-1:2022 | Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance |
| IEC 60793-2-10:2017 | Sectional specification for A1 multimode fibres |
| IEC 60793-1-20:2014 | Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry |
| IEC 60793-1-21:2001 | Optical fibres - Part 1-21: Measurement methods and test |

Excel Enbeam OM4 Multimode Armoured CST Fibre Optic Cable Loose Tube 4 Core 50/125 Cca Blue



Item Code: 274-204

| | |
|--|---|
| | procedures - Coating geometry |
| IEC 60793-1-22:2001 | Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement |
| IEC 60793-1-30:2010 | Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test |
| IEC 60793-1-41:2010 | Optical fibres - Part 1-41: Measurement methods and test procedures - Bandwidth |
| ITU G.651.1 | Characteristics of a 50/125 µm multimode graded index optical fibre cable for the optical access network |
| EN 50173-1:2018 | Information technology. Generic cabling systems - General requirements |
| EN 50575: 2014 + A1: 2016 | Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements |
| EN 50399:2011+A1:2016 | Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results |
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| ANSI/TIA 568-3.D | Optical Fiber Cabling and Components Standard |
| ANSI/TIA/EIA 598-D | Optical Fibre Cable Colour Coding |
| RoHS-II/-III (2011/65/EU & 2015/863): 2023 | Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III). |
| WFD: 2023 | Compliant to Waste Framework Directive |
| SCIP: 2023 | Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products) |
| POPs (EU) No 2019/1021 | EU Regulation for the restriction of Persistent Organic Pollutants. |

Part Number Table

| Part Number | Description |
|-------------|---|
| 274-204 | Excel Enbeam OM4 Multimode Armoured CST Fibre Optic Cable Loose Tube 4 Core 50/125 Cca Blue |
| 274-208 | Excel Enbeam OM4 Multimode Armoured CST Fibre Optic Cable Loose Tube 8 Core 50/125 Cca Blue |
| 274-212 | Excel Enbeam OM4 Multimode Armoured CST Fibre Optic Cable Loose Tube 12 |

Excel Enbeam OM4 Multimode Armoured CST Fibre
Optic Cable Loose Tube 4 Core 50/125 Cca Blue



Item Code: 274-204

| | |
|---------|--|
| | Core 50/125 LSOH Cca Blue |
| 274-216 | Excel Enbeam OM4 Multimode Armoured CST Fibre Optic Cable Loose Tube 16 Core 50/125 Cca Blue |
| 274-224 | Excel Enbeam OM4 Multimode Armoured CST Fibre Optic Cable Loose Tube 24 Core 50/125 LSOH Cca Blue |

Excel is a world class premium performing end to end infrastructure solution designed,
Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.