


# Excel Enbeam OS2 Drop Cable Micromodule G.657.A2 4 mm 2 Core 9/125 Cca Black

Item Code: 275-202

**excel**  
without compromise.

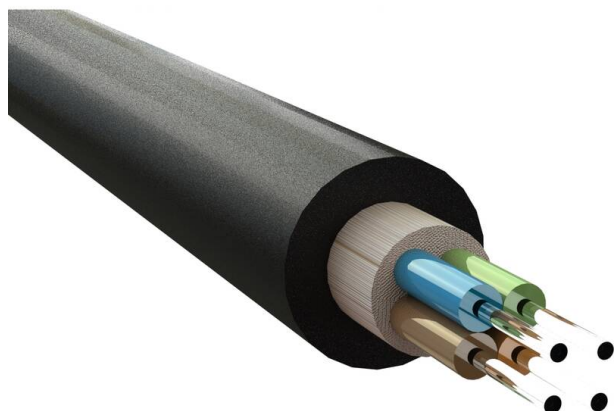

Suitable for internal/external use

G.657.A2

PIA approved

LSZH

UV-Resistant

Euro class Cca-s1,d1,a1

## Product Overview

Enbeam 2 fibre drop cable has been designed for internal and external installations aimed at the FTTH and multi dwelling market. The cable consists of a single core 900um single mode G.657.A2 fibre surrounded by a micromodule and aramid yarn as a strength member covered with a Black UV resistant LSZH outer sheath.

## Product Specifications

Feature	Values
Number of Cores	2
Type of tube	Tight
Fibre type	Single mode 9/125
Category	OS2
Rodent resistant	no
Outer sheath colour	Black
Flame retardant according to IEC 60332-1-2	yes
Low smoke (acc. IEC 61034-2)	yes
Reaction-to-fire class according to EN 13501-6	Cca
Smoke development class according to EN 13501-6	s1a
Euro class flaming droplets/particles according to EN	d1

13501-6


Euro class acidity according to EN 13501-6

a2

Outer diameter approx.

4 mm

### Cross-section diagram

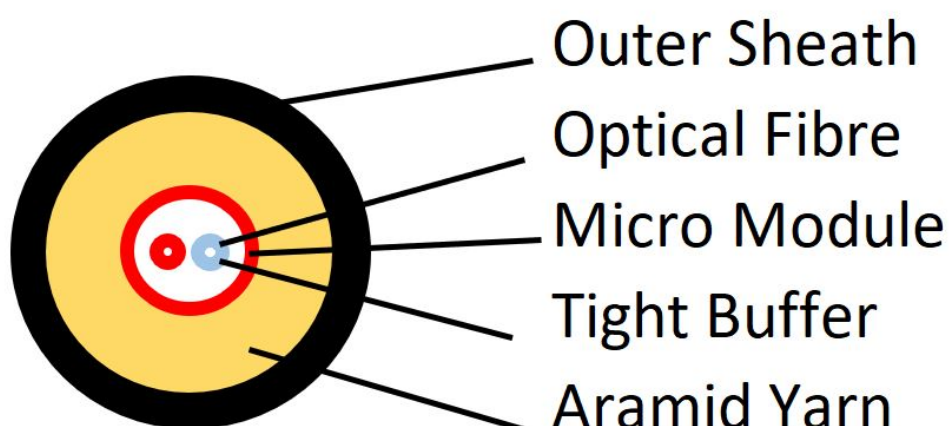

### Fibre specifications

Features	Values
Attenuation	@1310nm (dB/KM) ≤0.4
	@1550nm (dB/KM) ≤0.3
Outer jacket material	LSZH-UV resistant
Outer jacket colour	Black
Outer jacket thickness (mm)	0.6±0.05
Strength member	Aramid yarn
Fibre colour	Red/Blue
Tight buffer material	LSZH
Tight buffer diameter (mm)	0.9±0.05
Micro bundle colour	Red
Micro bundle jacket material	LSZH
Short term tensile strength	500N

# Excel Enbeam OS2 Drop Cable Micromodule G.657.A2 4 mm 2 Core 9/125 Cca Black

Item Code: 275-202



Minimum breaking tension	1200N
Short crush resistance (N/100 mm)	1000
Overall cable diameter	4mm
Operating temperature	-20 to +65 °C

## Standards

Applicable standard	Subject
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 60754-2:2011	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
IEC 60793-1-1:2022	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
ITU G.652.D	Characteristics of a single-mode optical fibre and cable
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50575: 2014 + A1: 2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements

# Excel Enbeam OS2 Drop Cable Micromodule G.657.A2 4 mm 2 Core 9/125 Cca Black

Item Code: 275-202



ANSI/TIA 568-3.D	Optical Fiber Cabling and Components Standard
ANSI/TIA/EIA 598-D	Optical Fibre Cable Colour Coding
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

## Part Number Table

Part Number	Description
275-202	Excel Enbeam OS2 Drop Cable Micromodule G.657.A2 4 mm 2 Core 9/125 Cca Black

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at [sales@excel-networking.com](mailto:sales@excel-networking.com)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.