

Item Code: 275-306



☒ Water resistant & UV resistant

☒ Duct grade - rodent resistant

☒ Sequentially metre marked

☒ Cut to length service

☒ Euroclass Cca-s1a-d0-a1

☒ 25 Year system warranty

☒ CIBSE TM65 Embodied Carbon: 0.566 kg CO₂e

Product Overview

Enbeam OS2 Singlemode CST Armoured Fibre Optic Cable Loose Tube 8 Core 9/125 LSZH Cca Blue, part of a huge range of OS2 fibre optic cables fully stocked at Mayflex.

Excel corrugated steel tape (CST) OS2 9/125 µm armoured loose tube optical fibre cables have been designed specifically for applications requiring a high degree of mechanical protection.

The singlemode fibre is G652D compliant low water peak grade and offers OS2 performance and OS1 backwards compatibility. These compact, lightweight cables are extremely rugged, provide rodent resistance and are quick and easy to install.

The CST cable has also been designed for direct burial, to ensure the correct installation a sand back fill must be used at all times.


Product Specifications

Feature	Values
Number of Cores	8
Type of tube	Loose tube
Number of fibres per tube	8
Fibre type	Single mode 9/125
Category	OS2
Rodent resistant	yes

Item Code: 275-306

Outer sheath material	Copolymer, thermoplastic (LSOH)
Outer sheath colour	Blue
Flame retardant according to IEC 60332-1-2	yes
Reaction-to-fire class according to EN 13501-6	Cca
Smoke development class according to EN 13501-6	s1a
Euro class flaming droplets/particles according to EN 13501-6	d0
Euro class acidity according to EN 13501-6	a1
Outer diameter approx.	9 mm

Cross-section diagram

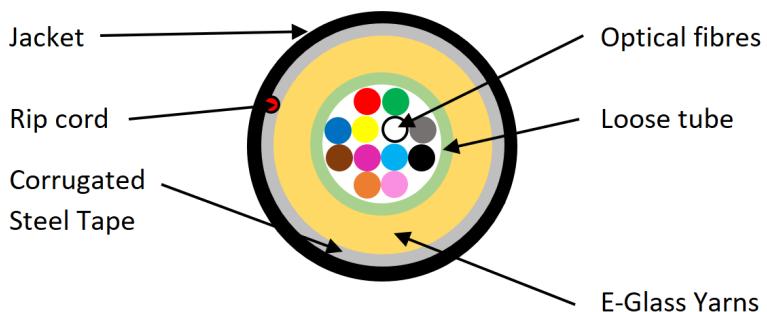

Colour coding (as per TIA-598-C)



For fibre core counts above 12 the colour sequence is repeated with the addition of a mark every 70mm for cores 13-24 and two marks for 25-36 and so on.

Item Code: 275-306

Cable specifications

Features	Values	
Tensile Strength	2000 N	
Crush Resistance	3000 N/m	
Torsion	$\pm 180^\circ$	
Temperature performance	 Installation Operation Storage	 -30°C to +70°C -30°C to +70°C -30°C to +70°C
Loose tubes	 Number Material	 1 PBT (Dry tube)
Loose Tube ID/OD	 4-16 Cores 24 Cores	 2.4/3.2 \pm 0.3 mm 3.2/4.0 \pm 0.3 mm
Peripheral Strength Member		Glass Yarn
Armoring	 Thickness Material	 0.150 mm ECCS Tape
Outer Sheath	 Thickness Material	 1.8 mm (Nominal) LSZH
Ripcord	 Number Material	 1 Polyester
Overall Cable Diameter	 4-16 Cores 24 Cores	 9.0 \pm 0.5 mm 9.5 \pm 0.5 mm
Cable Weight	 4-16 Cores 24 Cores	 100.0 \pm 10 kg/km 115 \pm 10 kg/km
Bending Radius	 Short term Long term	 20 x Diameter 10 x Diameter

Item Code: 275-306

Fibre specifications

Features	OS2
Attenuation	≤ 0.36 dB/km
	≤ 0.23 dB/km
Chromatic Dispersion	≤ 3.5 ps/nm.km
	≤ 18 ps/nm.km
Zero Dispersion Wavelength	1300 - 1324 nm
Zero Dispersion Slope	≤ 0.092 ps/nm ² .km
Polarisation Mode Dispersion	≤ 0.2 ps/v/km
Cut-off Wavelength	≤ 1260 nm
Mode Field Diameter	9.2 ± 0.4 µm
Core Cladding Concentricity Error	≤ 0.8 µm
Cladding Diameter	125 ± 1 µm
Cladding Non-circularity	≤ 1 %
Coating Diameter (Uncoloured)	245 ± 10 µm

Standards

Applicable Standard	Subject
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 60754-2:2014+A1:2020	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
IEC 60793-1-1:2022	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement

Item Code: 275-306

IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
ITU G.652.D	Characteristics of a single-mode optical fibre and cable
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50575: 2014 + A1: 2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
ANSI/TIA 568-3.D	Optical Fiber Cabling and Components Standard
ANSI/TIA/EIA 598-D	Optical Fibre Cable Colour Coding
IEC 60794-1-2/F5	Generic specification - Optical fibre cable test procedures - Bending test (Method F5)
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

Part Number Table

Part Number	Description
275-306	Excel Enbeam OS2 Singlemode Armoured CST Fibre Optic Cable Loose Tube 8 Core 9/125 Cca Blue
275-307	Excel Enbeam OS2 Singlemode Armoured CST Fibre Optic Cable Loose Tube 12 Core 9/125 Cca Blue
275-309	Excel Enbeam OS2 Singlemode Armoured CST Fibre Optic Cable Loose Tube 24 Core 9/125 Cca Blue

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.

excel
without compromise.