


Excel Enbeam OM4 Multimode Multi Tube Distribution Cable Tight Buffered 12 Core B2ca

LSZH
Item Code: 297-012

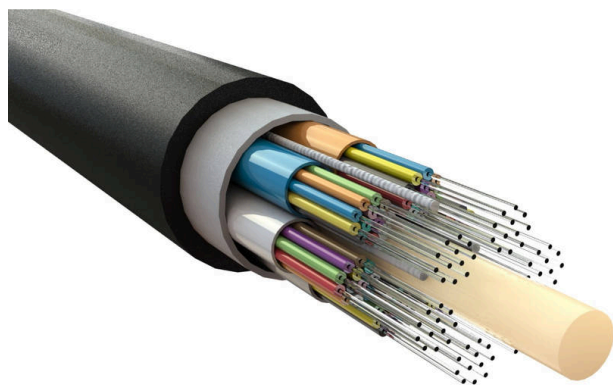

✕ Suitable for internal use only

✕ Multi tube configuration

✕ LSZH

✕ Euro class B2ca-s1,d1,a1

Product Overview


Excel Enbeam OM4 distribution cables have been designed specifically for internal applications. The cables are constructed using multiple LSZH sub cables with 12 x coloured 900um fibres surrounded by aramid yarn around a central FRP strength member.

This allows the cable to be used in internal applications with a euro class rating of B2ca.

Product Specifications

Feature	Values
Number of Cores	12
Type of tube	Tight
Number of fibres per tube	4
Fibre type	Multi mode 50/125
Category	OM4
Outer sheath material	LSZH
Outer sheath colour	Black
Reaction-to-fire class according to EN 13501-6	B2ca
Smoke development class according to EN 13501-6	s1a
Euro class flaming droplets/particles according to EN 13501-6	d1
Euro class acidity according to EN 13501-6	a1
Outer diameter approx.	11.8 mm

Product drawing

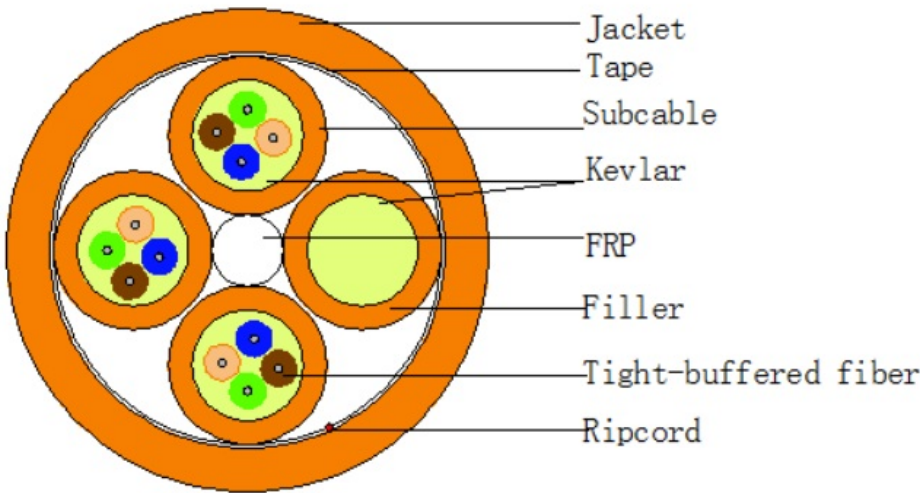

Cable specifications

Features		Values
Tensile strength	Long term	400N
	Short term	1320N
Crush resistance	Long term	200N/m
	Short term	1000N/m
Torsion		20N Cycles ± 180 °
Impact		1N/m
Temperature performance	Installation	-30°C to +70°C
	Operation	-30°C to +70°C
	Storage	-30°C to +70°C
Sub units		6
Sub unit OD		4.0 ± 0.2mm
Sub unit thickness		0.6 ± 0.01mm
Sub unit material		LSZH
Number of fibre per sub unit		4
Peripheral strength member		Aramid Yarn
Central strength member		FRP

Outer sheath

Excel Enbeam OM4 Multimode Multi Tube Distribution Cable Tight Buffered 12 Core B2ca

LSZH
Item Code: 297-012



	Material	LSZH
Ripcord	Number	1
	Material	Polyester
Bending radius	Short term	20 x Diameter
	Long term	10 x Diameter
Attenuation	@850nm	≤ 3.5 dB/km
	@1300 nm	≤ 1.5 dB/km
Core cladding concentricity error		≤ 2 µm
Cladding diameter		125 ± 1 µm
Cladding non-circularity		≤ 1.5 %
Coating diameter		125 ± 0.7 µm

Standards

Applicable standard	Subject
IEC 60794-2-20:2013	Optical fibre cables - Part 2-20: Indoor cables - Family specification for multi-fibre optical cables
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 60754-2:2011	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
IEC 60793-1-1:2022	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-2-10:2017	Sectional specification for A1 multimode fibres
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test

Excel Enbeam OM4 Multimode Multi Tube Distribution Cable Tight Buffered 12 Core B2ca

LSZH
Item Code: 297-012



	procedures - Fibre proof test
IEC 60793-1-41:2010	Optical fibres - Part 1-41: Measurement methods and test procedures - Bandwidth
ITU G.651.1	Characteristics of a 50/125 µm multimode graded index optical fibre cable for the optical access network
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50575: 2014 + A1: 2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
ANSI/TIA 568-3.D	Optical Fiber Cabling and Components Standard
ANSI/TIA/EIA 598-D	Optical Fibre Cable Colour Coding
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

Part Number Table

Part Number	Description
297-012	Excel Enbeam OM4 Multimode Multi Tube Distribution Cable Tight Buffered 12 Core B2ca LSZH

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.