

Excel Enbeam OS2 Micro Blown G.657.A1 Fibre Cable Loose Tube 72 Core HDPE Fca Black

Part Code: 325-072

sales@excel-networking.com
excel-networking.com

CIBSE TM65 Embodied Carbon: 0.161 kg CO2e



Main Features

- / G.657.A1 bend insensitive
- / Small light weight design
- / Euroclass: Fca
- / 12 to 432 cores available
- / Recommended internal duct size: 10 mm
- / High Density Polyethylene (HDPE) outer jacket

Product Overview

Enbeam OS2 micro blown SM G.657.A1 fibre cable loose tube 72 Core 9/125 HDPE Fca black, part of a huge range of OS2 fibre optic cables fully stocked at Mayflex.

The Enbeam micro blown fibre has been designed for blowing into the Enbeam micro-duct system.

The cable is constructed from multiple gel filled loose tubes around a central strength member, overlaid with water blocking yarn and covered with a High Density Polyethylene (HDPE) outer jacket.

The small diameter 5.3 mm to 12.2 mm allows high core count fibres to be blown into the access network down micro-duct with an inner diameter as small as 10 mm to 18 mm.

Excel Enbeam OS2 Micro Blown G.657.A1 Fibre Cable Loose Tube 72 Core HDPE Fca Black

Part Code: 325-072

sales@excel-networking.com
excel-networking.com

Please note this cable is used for blown systems only and should not be manually pulled into ducts.

Product Specifications


Feature	Values
Number of Cores	72
Type of tube	Loose tube
Number of fibres per tube	12
Fibre type	Single mode 9/125
Category	OS2
Outer sheath material	HDPE
Outer sheath colour	Black
Reaction-to-fire class according to EN 13501-6	Fca
Outer diameter approx.	5.3 mm
Blown system	yes

Excel Enbeam OS2 Micro Blown G.657.A1 Fibre Cable
Loose Tube 72 Core HDPE Fca Black


Part Code: 325-072

sales@excel-networking.com
excel-networking.com

Product drawing

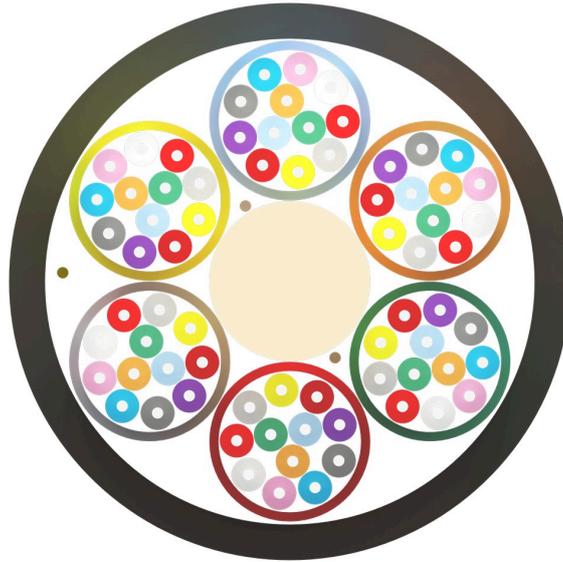

Colour coding (as per TIA-598-C)

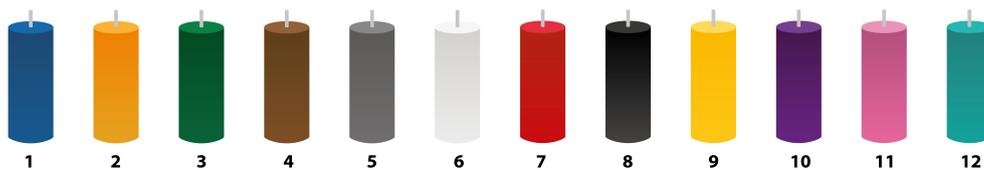

For fibre core counts above 12 the colour sequence is repeated with the addition of a mark every 70mm for cores 13-24 and two marks for 25-36 and so on.

Excel Enbeam OS2 Micro Blown G.657.A1 Fibre Cable Loose Tube 72 Core HDPE Fca Black

Part Code: 325-072

sales@excel-networking.com
excel-networking.com

Cable specifications

Features	Values	
Weight (kg/km)	48-72 core	23 (nominal)
	96-core	35 (nominal)
	144-core	52 (nominal)
	192-core	56 (nominal)
	288-core	81 (nominal)
	432-core	116 (nominal)
	Loose tube material	PBT
Type of filling compound	Jelly	
Number of loose tubes/fillers	48-core	4/2
	72-core	6/0
	96-core	8/0
	144-core	12/0
	192-core	16/2
	288-core	24/0
	432-core	18/0
Central strength member type	FRP	
Tensile performance (N)	Long term	150 N
	Short term	450 N
Crush Resistance	Long term	150 N/100 mm
	Short term	450 N/100 mm
Minimum Bending Radius	During installation	20D
	After installation	10D

Excel Enbeam OS2 Micro Blown G.657.A1 Fibre Cable Loose Tube 72 Core HDPE Fca Black

Part Code: 325-072

sales@excel-networking.com
excel-networking.com

Temperature **Operating** **-20°C to +70°C**

Fibre specifications

Features		Values
Attenuation	@1310nm	≤0.38 dB/km
	@1383nm	≤0.38 dB/km
	@1550nm	≤0.26 dB/km
	@1625nm	≤0.26 dB/km
Chromatic Dispersion Coefficient	1285nm – 1330nm	≤3.5ps/km·nm
	@1550nm	≤18.0ps/km·nm
Zero Dispersion Wavelength, λ ₀		1300-1324nm
Zero Dispersion Slope		≤0.092 ps/(km·nm ²)
Cut-off Wavelength, λ _{cc}		≤1260nm
Polarization mode dispersion	Individual fibre	≤0.2ps/√Km
	Design link value (M=20, Q=0.01%)	≤0.1ps/√Km
Macro Bending Loss	10 turns, 15mm radius	≤0.25dB@1550nm
		≤1.0dB@1625nm
	1 turns, 10mm radius	≤0.75dB@1550nm
		≤1.5dB@1625nm
Cladding Diameter		125.0±1.0μm
Cladding Non-circularity		≤1.0%
Primary Coating Diameter		250±15μm

Excel Enbeam OS2 Micro Blown G.657.A1 Fibre Cable Loose Tube 72 Core HDPE Fca Black

Part Code: 325-072

sales@excel-networking.com
excel-networking.com

Core Concentricity Error		≤0.6μm
Coating – Cladding Concentricity Error		≤12μm
Fibre Curl Radius		≥4m
Mode Field Diameter	@1310nm	9.2±0.4μm
Point discontinuity		≤0.05db
Proof Stress Level		≥100kpsi (0.69 GPa)
Coating strip force	Peak	1.3-8.9N

Standards

Applicable standard	Subject
IEC 60793-1-1:2022	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
ITU G.652.D	Characteristics of a single-mode optical fibre and cable
ITU-T G.657	Characteristics of a bending-loss insensitive single-mode optical fibre and cable
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50575: 2014 + A1: 2016	Power, control and communication cables — Cables for

Excel Enbeam OS2 Micro Blown G.657.A1 Fibre Cable Loose Tube 72 Core HDPE Fca Black

Part Code: 325-072

sales@excel-networking.com
excel-networking.com

	general applications in construction works subject to reaction to fire requirements
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
ANSI/TIA 568-3.D	Optical Fiber Cabling and Components Standard
ANSI/TIA/EIA 598-D	Optical Fibre Cable Colour Coding
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Part Code Table

Part Code	Description
325-072	Excel Enbeam OS2 Micro Blown G.657.A1 Fibre Cable Loose Tube 72 Core HDPE Fca Black

Excel Enbeam OS2 Micro Blown G.657.A1 Fibre Cable
Loose Tube 72 Core HDPE Fca Black



Part Code: 325-072

sales@excel-networking.com
excel-networking.com