


Excel Enbeam OS2 Micro Blown G.657.A1 200 µm
Fibre Cable Loose Tube 144 Core HDPE Fca Black



Item Code: 328-144

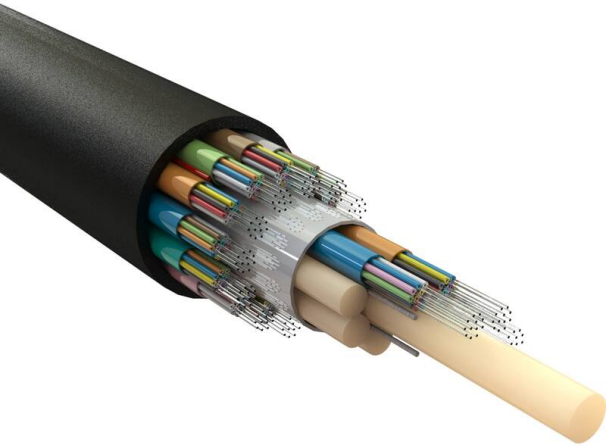

- ✕ G.657.A1 Bend insensitive
- ✕ High core count
- ✕ Small light weight design
- ✕ Recommended internal duct size - 10 mm
- ✕ Euroclass: Fca
- ✕ High Density Polyethylene (HDPE) outer jacket

Product Overview

Enbeam OS2 micro blown SM G.657.A1 200 µm fibre cable loose tube 144 core 9/125 HDPE Fca black, part of a huge range of OS2 fibre optic cables fully stocked at Mayflex. The Enbeam Micro Blown 200 µm fibre has been designed for blowing into the Enbeam Micro-duct system.

The cable is constructed from multiple gel filled loose tubes around a central strength member, overlaid with water blocking yarn and covered with a High Density Polyethylene (HDPE) outer jacket.

The small diameter 5.6 mm to 9.6 mm allows high core count fibres to be blown into the access network down micro-duct with an inner diameter as small as 10 mm to 14 mm.

Please note this cable is used for blown systems only and should not be manually pulled into ducts.

Product Specifications

Feature	Values
Number of Cores	144
Type of tube	Loose tube
Number of fibres per tube	24
Fibre type	Single mode 9/125
Category	OS2
Outer sheath material	HDPE
Outer sheath colour	Black


Excel Enbeam OS2 Micro Blown G.657.A1 200 µm
Fibre Cable Loose Tube 144 Core HDPE Fca Black




Item Code: 328-144

Reaction-to-fire class according to EN 13501-6	Fca
Outer diameter approx.	5.6 mm
Blown system	yes

Product drawing

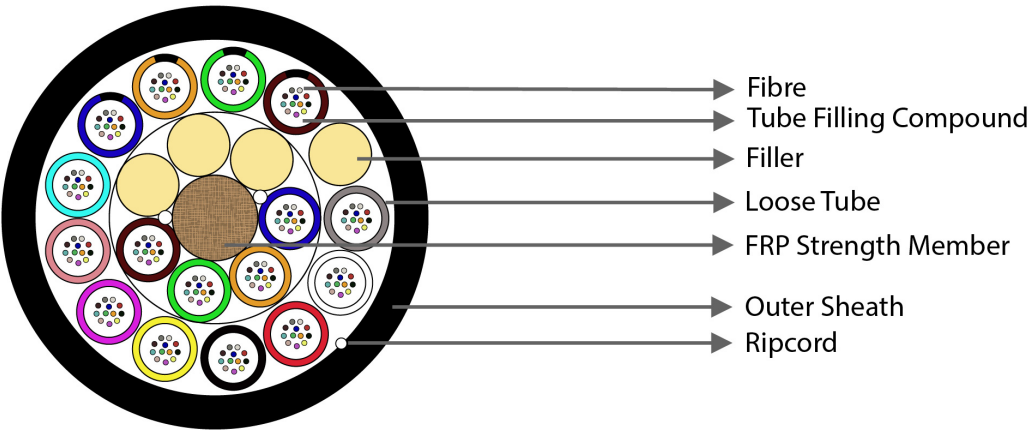

Colour coding (as per TIA-598-C)

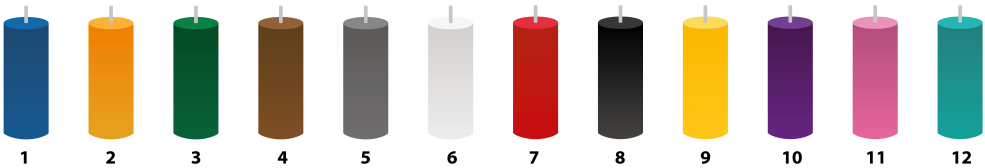

For fibre core counts above 12 the colour sequence is repeated with the addition of a mark every 70mm for cores 13-24 and two marks for 25-36 and so on.

Item Code: 328-144

Cable specifications

Features		Values
Weight (kg/km)	144-core	46 (nominal)
	192-core	51 (nominal)
	288-core	65 (nominal)
	432-core	79 (nominal)
Loose tube material		PBT
Type of filling compound		Jelly
Number of loose tubes/fillers	144-core	12/0
	192-core	16/4
	288-core	24/0
	432-core	18/0
Central strength member type		FRP
Tensile performance (N)	long term	0.15G
	short term	0.5G
Crush Resistance	long term	150 N/100mm
	short term	450 N/100mm
Minimum Bending Radius	short term	10D
	long term	20D
Temperature	operating	-20°C to +70°C

Fibre specifications

Features		Values
Attenuation	@1310nm	≤0.4 dB/km
	@1383nm	≤0.4 dB/km
	@1550nm	≤0.30 dB/km
	@1625nm	≤0.30 dB/km
Chromatic Dispersion Coefficient	1288nm - 1339nm	≤3.5ps/km·nm
	1271nm - 1360nm	≤5.3ps/km·nm
	@1550nm	≤18.0ps/km·nm
Zero Dispersion Wavelength, λ ₀		1300-1324nm

Excel Enbeam OS2 Micro Blown G.657.A1 200 µm Fibre Cable Loose Tube 144 Core HDPE Fca Black



Item Code: 328-144

Zero Dispersion Slope		$\leq 0.092 \text{ ps}/(\text{km}\cdot\text{nm}^2)$
Cut-off Wavelength, λ_{cc}		$\leq 1260\text{nm}$
Polarization mode dispersion	Individual fibre	$\leq 0.2\text{ps}/\sqrt{\text{Km}}$
	Design link value (M=20, Q=0.01%)	$\leq 0.1\text{ps}/\sqrt{\text{Km}}$
Macro Bending Loss	10 turns, 15mm radius	$\leq 0.25\text{dB}@1550\text{nm}$
		$\leq 1.0\text{dB}@1625\text{nm}$
	1 turns, 10mm radius	$\leq 0.75\text{dB}@1550\text{nm}$
		$\leq 1.5\text{dB}@1625\text{nm}$
Cladding Diameter		$125.0\pm 1.0\mu\text{m}$
Cladding Non-circularity		$\leq 1.0\%$
Primary Coating Diameter		$200\pm 15\mu\text{m}$
Core Concentricity Error		$\leq 0.6\mu\text{m}$
Coating – Cladding Concentricity Error		$\leq 12\mu\text{m}$
Fibre Curl Radius		$\geq 4\text{m}$
Mode Field Diameter	@1310nm	$8.6-9.5\pm 0.4\mu\text{m}$
Point discontinuity		$\leq 0.05\text{dB}$
Proof Stress Level		$\geq 100\text{kpsi}$ (0.69 GPa)
Coating strip force	Peak	1.3-8.9N

Standards

Applicable standard	Subject
IEC 60793-1-1:2022	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
ITU G.652.D	Characteristics of a single-mode optical fibre and cable
ITU-T G.657	Characteristics of a bending-loss insensitive single-mode

Excel Enbeam OS2 Micro Blown G.657.A1 200 µm Fibre Cable Loose Tube 144 Core HDPE Fca Black



Item Code: 328-144

optical fibre and cable

EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50575: 2014 + A1: 2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
ANSI/TIA 568-3.D	Optical Fiber Cabling and Components Standard
ANSI/TIA/EIA 598-D	Optical Fibre Cable Colour Coding
RoHS-II/III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

Part Number Table

Part Number	Description
328-144	Excel Enbeam OS2 Micro Blown G.657.A1 200 µm Fibre Cable Loose Tube 144 Core HDPE Fca Black
328-288	Excel Enbeam OS2 Micro Blown G.657.A1 200 µm Fibre Cable Loose Tube 288 Core HDPE Fca Black
328-432	Excel Enbeam OS2 Micro Blown G.657.A1 200 µm Fibre Cable Loose Tube 432 Core HDPE Fca Black

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.