


Excel Enbeam OS2 Micro Blown G.657.A1 200 µm  
Fibre Cable Loose Tube 192 Core HDPE Fca Black



Item Code: 328-192

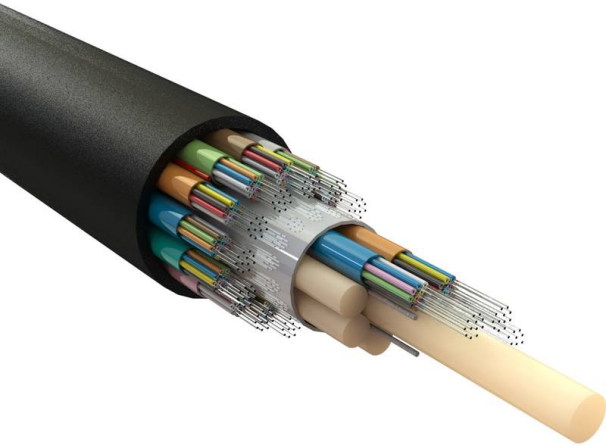

- ✕ G.657.A1 Bend insensitive
- ✕ High core count
- ✕ Small light weight design
- ✕ Recommended internal duct size - 10mm
- ✕ Euroclass Fca
- ✕ High Density Polyethylene (HDPE) outer jacket

Product Overview

Enbeam OS2 Micro Blown SM G.657.A1 200um Fibre Cable Loose Tube 192 Core 9/125 HDPE Fca Black, part of a huge range of OS2 fibre optic cables fully stocked at Mayflex.  
The Enbeam Micro Blown 200µm fibre has been designed for blowing into the Enbeam Micro-duct system.

The cable is constructed from multiple gel filled loose tubes around a central strength member, overlaid with water blocking yarn and covered with a High Density Polyethylene (HDPE) outer jacket. The small diameter 6.2mm to 9.6mm allows high core count fibres to be blown into the access network down micro-duct with an inner diameter as small as 10 to 14 mm.

Please note this cable is used for blown systems only and should not be manually pulled into ducts.

Product Specifications

Feature	Values
Number of Cores	192
Type of tube	Loose tube
Number of fibres per tube	12
Fibre type	Single mode 9/125
Category	OS2
Outer sheath material	HDPE
Outer sheath colour	Black
Reaction-to-fire class according to EN 13501-6	Fca

Excel Enbeam OS2 Micro Blown G.657.A1 200 µm  
Fibre Cable Loose Tube 192 Core HDPE Fca Black



Item Code: 328-192

Outer diameter approx.	7.6 mm
Blown system	yes

Part Number Table

Part Number	Description
328-192	ENBEAM MICRO BLOWN 192 CORE 200um SM G657-A1 Fca

Excel is a world class premium performing end to end infrastructure solution designed,  
Manufactured, supported and delivered without compromise.

Contact us at [sales@excel-networking.com](mailto:sales@excel-networking.com)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.