

# Excel 10 Way Vertical PDU 10x UK Socket Passive 13A C20 Plug Switched

excel  
without compromise.

Part Code: 555-264

sales@excel-networking.com  
excel-networking.com



## Main Features

- / UK style sockets to BS1363
- / LED indicated unit power
- / 250 volt AC, 50/60 Hz Rating
- / High quality, light weight aluminium housing
- / Choose from vertical and horizontal options
- / CE compliant, ROHS complaint

## Product Overview

The Excel range of power distribution units are designed for installation and use within 19" networking cabinets and enclosures. Each unit comprises a high quality aluminium extruded housing into which are loaded up to 12 sockets.

In this particular range each socket is UK style, manufactured in accordance with the BS1363 standard, the 3 metre input lead is terminated with a C20 3 pin plug.

The sockets are mounted at a 45° angle on the vertical PDUs and a 90° angle on the horizontal PDUs to aid with cable management. The range of available units includes 19" horizontally mounted, and higher density vertical mounted options, each unit contains a fully shrouded switch to control input power, and a LED indicator to confirm power to the unit.

# Excel 10 Way Vertical PDU 10x UK Socket Passive 13A C20 Plug Switched

Part Code: 555-264

sales@excel-networking.com  
excel-networking.com

## Product Specifications


Feature	Values
Mounting size	<b>815 mm</b>
Mounting direction	<b>Vertical</b>
Electrical connection	<b>Connecting cord with plug</b>
Type of electric plug connection	<b>C20</b>
Cable length	<b>3 m</b>
Number of UK BS1363 sockets	<b>10</b>
Number of rack units (RU)	<b>2</b>
Length	<b>815 mm</b>
Width	<b>44.4 mm</b>
Height	<b>62 mm</b>
Supply voltage	<b>250 V</b>
Surge Protected	<b>no</b>
Switchable	<b>yes</b>
With LED indication	<b>yes</b>
With fuse	<b>no</b>
With mounting bracket	<b>yes</b>

# Excel 10 Way Vertical PDU 10x UK Socket Passive 13A C20 Plug Switched

Part Code: 555-264

sales@excel-networking.com  
excel-networking.com

## Product drawings

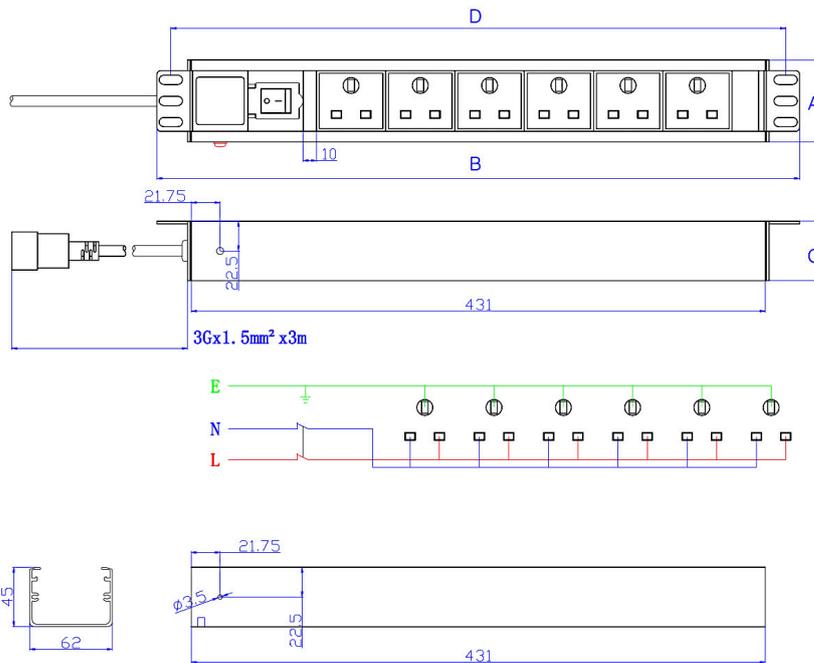

Key	
A	Height
B	Width
C	Depth
D	Mounting Centres

All dimensions are in mm unless stated otherwise

## Additional specifications

Features	Values
Rated voltage	250 V AC 50/60 Hz
Rated current	13 A
Maximum power	3250 W
Unit control	LED indicator (On/off rocker switch)
Insulation resistance	≥ 5MΩ
Fire resistance	Flame retardant
Operating temperature	-10°C to +45°C
Relative humidity	0% to 90%
Cable entry (horizontal orientation)	Left

# Excel 10 Way Vertical PDU 10x UK Socket Passive 13A C20 Plug Switched

Part Code: 555-264

sales@excel-networking.com  
excel-networking.com

Cable entry (vertical orientation)	<b>Top</b>
Socket angle (horizontal orientation)	<b>90°</b>
Socket angle (vertical orientation)	<b>45°</b>
Master circuit breaker	<b>No</b>
Master switch	<b>Yes</b>
Housing colour	<b>Silver</b>
Housing material	<b>Aluminum</b>

## Included accessories

Accessories	Quantity
M6 x 4 fixings	<b>x4</b>
User manual	<b>x1</b>
6 mm earth cable	<b>x1</b>

## Standards

Applicable standard	Detail
BS 1363-2:1995	13 A plugs, socket-outlets, adaptors and connection units. Specification for 13 A switched and unswitched socket outlets
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.

# Excel 10 Way Vertical PDU 10x UK Socket Passive 13A C20 Plug Switched

Part Code: 555-264

sales@excel-networking.com  
excel-networking.com

Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

## Part Code Table

Part Code	Description
555-262	<b>Excel 6 Way Horizontal PDU 6x UK Socket Passive 13A C20 Plug Switched</b>
555-263	<b>Excel 8 Way Vertical PDU 8x UK Socket Passive 13A C20 Plug Switched</b>
555-264	<b>Excel 10 Way Vertical PDU 10x UK Socket Passive 13A C20 Plug Switched</b>
555-265	<b>Excel 12 Way Vertical PDU 12x UK Socket Passive 13A C20 Plug Switched</b>