# Excel 8 Way Horizntal PDU 8x C13 Socket Passive 10A C20 Plug Switched

**Part Code: 555-267**

sales@excel-networking.com
excel-networking.com

CIBSE TM65 Embodied Carbon: 12.066 kg CO2e



## Main Features

- / IEC 60320 C13 style sockets
- / LED indicated unit power
- / 250 volt AC, 50/60 Hz rating
- / High quality, light weight aluminium housing
- / Choose from vertical and horizontal options
- / CE compliant, ROHS complaint

## Product Overview

The Excel range of power distribution units are designed for installation and use within 19" networking cabinets and enclosures. Each unit comprises a high quality aluminium extruded housing into which are loaded up to 12 sockets. In this particular range each socket is IEC C13 style, the 3 metre input lead is terminated with a C20 3 pin plug.

The range of available units includes 19" horizontally mounted, and higher density vertical mounted options, each unit contains a fully shrouded switch to control input power, and a LED indicator to confirm power to the unit.


This data sheet was generated at 6:26pm 10th November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

## Product Specifications

| Feature | Values |
|---|---|
| Mounting dimension | **19 inch** |
| Mounting size | **462 mm** |
| Mounting direction | **Horizontal** |
| Electrical connection | **Connecting cord with plug** |
| Type of electric plug connection | **C20** |
| Cable length | **3 m** |
| Number of C13 socket outlets | **8** |
| Number of rack units (RU) | **1** |
| Length | **482 mm** |
| Width | **45 mm** |
| Height | **60 mm** |
| Supply voltage | **250 V** |
| Surge Protected | **no** |
| Switchable | **yes** |
| With LED indication | **yes** |
| With fuse | **no** |
| With mounting bracket | **yes** |




This data sheet was generated at 6:26pm 10th November 2026 and is subject to change at any time.

# Excel 8 Way Horizntal PDU 8x C13 Socket Passive 10A C20 Plug Switched

**Part Code: 555-267**

sales@excel-networking.com
excel-networking.com

## Product drawings

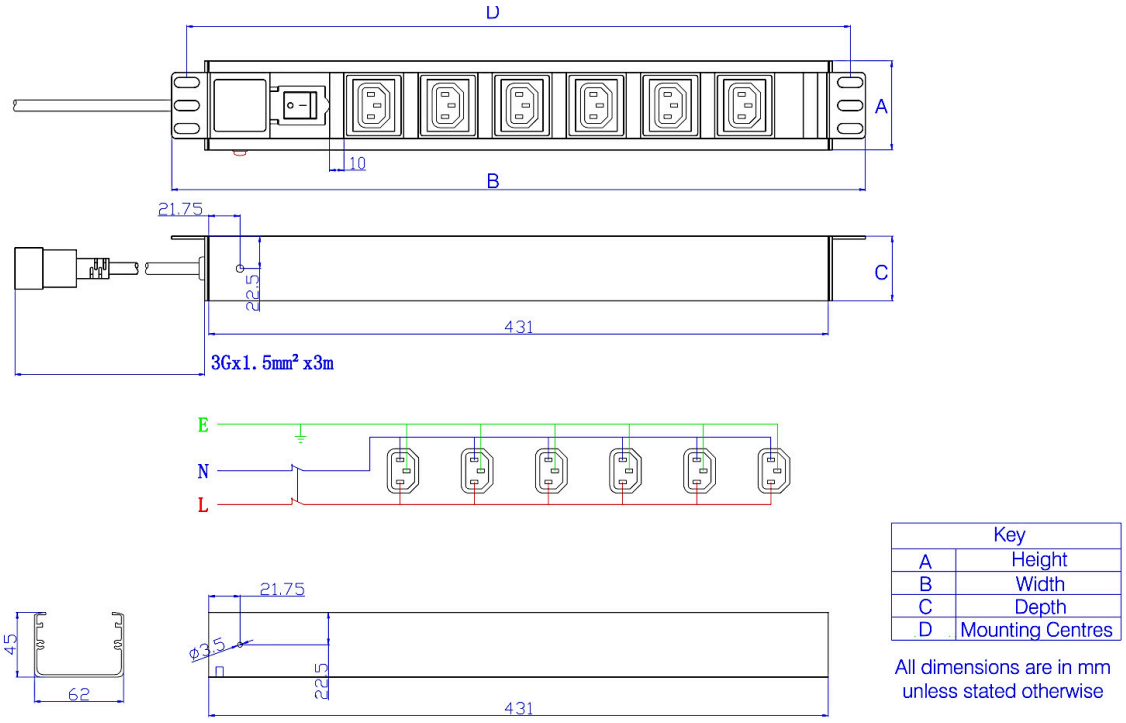


| Key | |
|---|---|
| A | Height |
| B | Width |
| C | Depth |
| D | Mounting Centres |

All dimensions are in mm unless stated otherwise

## Additional specifications

| Features | Values |
|---|---|
| Rated voltage | **250 V AC 50/60 Hz** |
| Rated current | **10 A** |
| Maximum power | **2500 W** |
| Unit control | **LED indicator (on/off rocker switch)** |
| Insulation resistance | **≥ 5 MΩ** |
| Fire resistance | **Flame retardant** |
| Operating temperature | **-10 °C to +45 °C** |
| Relative humidity | **0% to 90%** |


This data sheet was generated at 6:26pm 10th November 2026 and is subject to change at any time.

| | |
|---|---|
| Cable entry (horizontal orientation) | **Left** |
| Cable entry (vertical orientation) | **Top** |
| Socket angle | **90 °** |
| Master circuit breaker | **No** |
| Master switch | **Yes** |
| Housing colour | **Silver** |
| Housing material | **Aluminum** |

## Included accessories

| Accessories | Quantity |
|---|---|
| M6 x 4 fixings | **x4** |
| User manual | **x1** |
| 6 mm earth cable | **x1** |

## Standards

| Applicable standard | Detail |
|---|---|
| IEC 60884-1:2002 + AMD1:2006 + AMD2:2013 CSV | Plugs and socket-outlets for household and similar purposes - Part1: General requirements |
| IEC 60884-2-1:2006 | Plugs and socket-outlets for household and similar purposes - Part 2-1: Particular requirements for fused plugs |
| IEC 60884-2-2:2006 | Plugs and socket-outlets for household and similar purposes - Part 2-2: Particular requirements for socket-outlets for appliances |


This data sheet was generated at 6:26pm 10th November 2026 and is subject to change at any time.

| | |
|---|---|
| IEC 60884-2-7:2011 + AMD1:2013 CSV | Plugs and socket-outlets for household and similar purposes - Part 2-7: Particular requirements for cord extension sets |
| Directive 2011/65/EU (RoHS II) | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states). |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant. |
| Directive 2008/98/EC (WFD) | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988). |
| ECHA SCIP Database | Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH. |
| Regulation (EU) 2019/1021 (POPs) | EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355). |
| UK SI 2012 No. 3032 | The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019. |

## Part Code Table

| Part Code | Description |
|---|---|
| 555-267 | **Excel 8 Way Horizntal PDU 8x C13 Socket Passive 10A C20 Plug Switched** |


This data sheet was generated at 6:26pm 10th November 2026 and is subject to change at any time.