# Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Grey

**Part Code: BBS001MPLGE**

sales@excel-networking.com
excel-networking.com

CIBSE TM65 Embodied Carbon: 0.246 kg CO2e

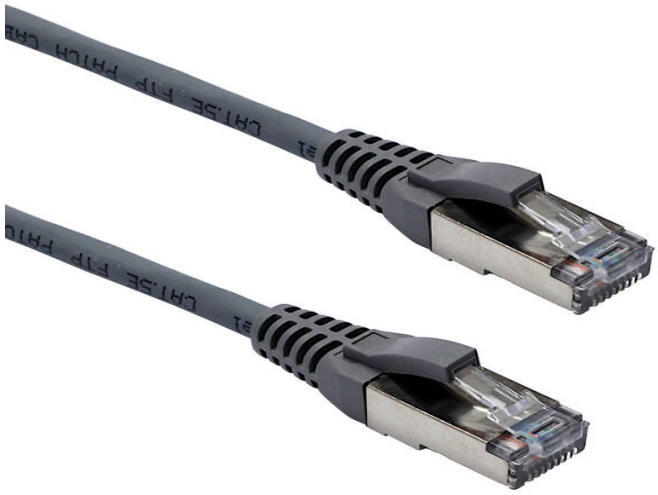

## Main Features

/ Cat5e compliant

/ Independently verified, T568B wiring

/ Choice of colours, individually packaged

/ Foil tape screen with LSOH outer sheath

/ Supports Gigabit ethernet

/ Blade style 'slimline' moulded strain relief boot with clip protector

## Product Overview

Excel Category 5e F/UTP Patch Leads are manufactured and tested to ISO11801 Category 5e and EIA/TIA 568 standards.

Each cable consists of 8 colour coded stranded conductors twisted together to form 4 pairs with varying lay lengths. Cables are fitted with plastic strain relief boots, for applications that may require continuous patching or a degree of stress relief applied.

## Product Specifications



This data sheet was generated at 6:58am 28th November 2026 and is subject to change at any time.

# Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Grey

**Part Code: BBS001MPLGE**

sales@excel-networking.com
excel-networking.com

| Feature | Values |
|---|---|
| Cable type | **F/UTP** |
| Category | **5E** |
| Length | **1 m** |
| Type of connector connection 1 | **RJ45 8(8)** |
| Type of connector connection 2 | **RJ45 8(8)** |
| Outer sheath colour | **Grey** |
| Strain relief boot | **Moulded-on** |
| Lockable | **no** |
| Strain relief boot colour | **Grey** |
| Flame retardant version | **yes** |
| Cable construction | **1x4** |
| AWG-size | **26** |
| Pin assignment | **1:1** |


This data sheet was generated at 6:58am 28th November 2026 and is subject to change at any time.

## Product drawing

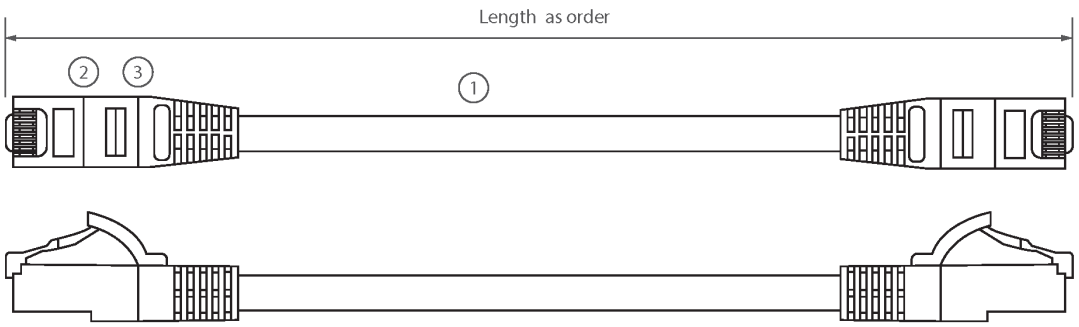


1. 4 pair individually foil screen LS0H cable
2. RJ45 connector with 50µm gold plated staggered pins
3. Slimline blade style strain relief boot

## Standards

| Applicable standard | Detail |
|---|---|
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| EN 50173-1:2018 | Information technology. Generic cabling systems - General requirements |
| ANSI/TIA 568-2.D | Balanced Twisted-Pair Telecommunications Cabling and Components Standards |
| IEC 61156-5:2009+AMD1:2012 CSV | Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification |
| IEC 60332-1-2:2004 | Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame |


This data sheet was generated at 6:58am 28th November 2026 and is subject to change at any time.

| | |
|---|---|
| EN 50399:2011+A1:2016 | Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results |
| IEC 61034-2:2005+A1:2013 | Measurement of smoke density of cables burning under defined conditions – Part 2: Test procedure and requirements |
| Directive 2011/65/EU (RoHS II) | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states). |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant. |
| Directive 2008/98/EC (WFD) | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988). |
| ECHA SCIP Database | Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH. |
| Regulation (EU) 2019/1021 (POPs) | EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355). |
| UK SI 2012 No. 3032 | The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019. |

## Part Code Table

| Part Code | Description |
|---|---|
| BBS0.2MPLGE | **Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 0.2 m Grey** |
| BBS0.5MPLGE | **Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 0.5 m Grey** |


This data sheet was generated at 6:58am 28th November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

| | |
|---|---|
| BBS001MPLBU | **Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Blue** |
| BBS001MPLGE | **Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Grey** |
| BBS001MPLGN | **Excel Cat5e Patch Lead F/UTP Shielded LS0H Blade Booted 1m Green** |
| BBS001MPLRD | **Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Red** |
| BBS002MPLGE | **Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 2 m Grey** |
| BBS003MPLBU | **Excel Cat5e Patch Lead F/UTP Shielded LS0H Blade Booted 3m Blue** |
| BBS003MPLGE | **Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 3 m Grey** |
| BBS003MPLGN | **Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 3 m Green** |
| BBS003MPLRD | **Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 3 m Red** |
| BBS003MPLYW | **Excel Cat5e Patch Lead F/UTP Shielded LS0H Blade Booted 3m Yellow** |
| BBS005MPLGE | **Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 5 m Grey** |
| BBS007MPLGE | **Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 7 m Grey** |
| BBS010MPLGE | **Excel Cat5e Patch Lead F/UTP Shielded LS0H Blade Booted 10 m Grey** |
| BBS150MPLGE | **Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 15m Grey** |



This data sheet was generated at 6:58am 28th November 2026 and is subject to change at any time.