


# Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Red

excel  
without compromise.

Part Code: BBS001MPLRD

sales@excel-networking.com  
excel-networking.com

CIBSE TM65 Embodied Carbon: 0.246 kg CO2e

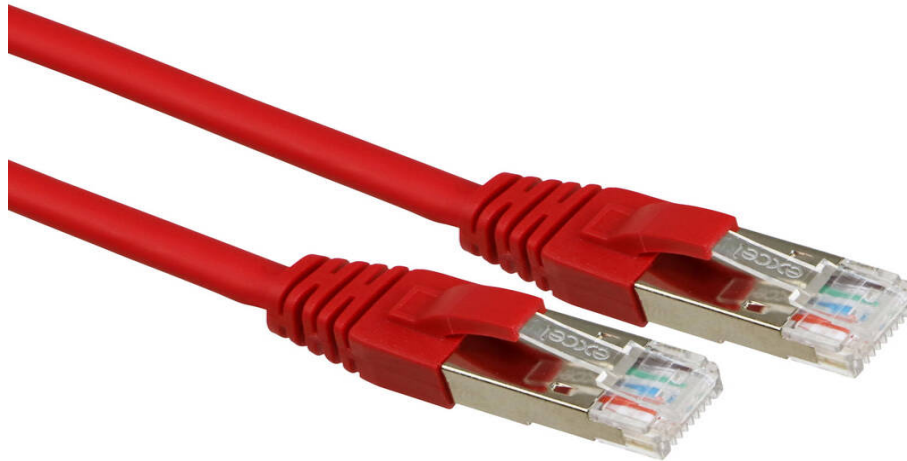

## Main Features

- / Cat5e compliant
- / Independently verified, T568B wiring
- / Choice of colours, individually packaged
- / Foil tape screen with LSOH outer sheath
- / Supports Gigabit ethernet
- / Blade style 'slimline' moulded strain relief boot with clip protector

## Product Overview

Excel Category 5e F/UTP Patch Leads are manufactured and tested to ISO11801 Category 5e and EIA/TIA 568 standards.

Each cable consists of 8 colour coded stranded conductors twisted together to form 4 pairs with varying lay lengths. Cables are fitted with plastic strain relief boots, for applications that may require continuous patching or a degree of stress relief applied.

## Product Specifications

# Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Red

Part Code: **BBS001MPLRD**

[sales@excel-networking.com](mailto:sales@excel-networking.com)  
[excel-networking.com](http://excel-networking.com)


Feature	Values
Cable type	<b>F/UTP</b>
Category	<b>5E</b>
Length	<b>1 m</b>
Type of connector connection 1	<b>RJ45 8(8)</b>
Type of connector connection 2	<b>RJ45 8(8)</b>
Outer sheath colour	<b>Red</b>
Strain relief boot	<b>Moulded-on</b>
Lockable	<b>no</b>
Strain relief boot colour	<b>Red</b>
Flame retardant version	<b>yes</b>
Cable construction	<b>1x4</b>
AWG-size	<b>26</b>
Pin assignment	<b>1:1</b>

# Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Red

Part Code: BBS001MPLRD

sales@excel-networking.com  
excel-networking.com

## Product drawing

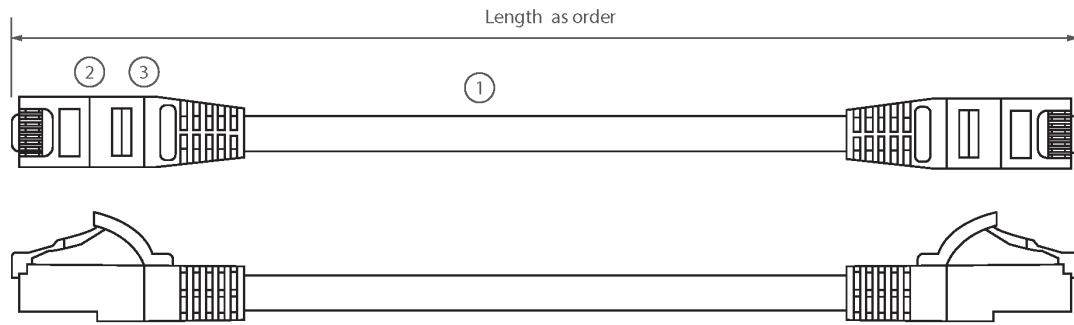

- ① 4 pair individually foil screen LSOH cable
- ② RJ45 connector with 50µm gold plated staggered pins
- ③ Slimline blade style strain relief boot

## Standards

Applicable standard	Detail
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame

# Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Red

Part Code: BBS001MPLRD

sales@excel-networking.com  
excel-networking.com

EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under defined conditions – Part 2: Test procedure and requirements
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

## Part Code Table

Part Code	Description
BBS0.2MPLGE	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 0.2 m Grey
BBS0.5MPLGE	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 0.5 m Grey

# Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Red

Part Code: **BBS001MPLRD**

[sales@excel-networking.com](mailto:sales@excel-networking.com)  
[excel-networking.com](http://excel-networking.com)

BBS001MPLBU	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Blue
BBS001MPLGE	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Grey
BBS001MPLGN	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1m Green
BBS001MPLRD	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Red
BBS002MPLGE	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 2 m Grey
BBS003MPLBU	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 3m Blue
BBS003MPLGE	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 3 m Grey
BBS003MPLGN	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 3 m Green
BBS003MPLRD	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 3 m Red
BBS003MPLYW	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 3m Yellow
BBS005MPLGE	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 5 m Grey
BBS007MPLGE	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 7 m Grey
BBS010MPLGE	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 10 m Grey
BBS150MPLGE	Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 15m Grey