

Excel WR 6U 400 mm Deep - Grey

excel
without compromise.

Référence du produit: WB6.4SG

sales@excel-networking.com
excel-networking.com



Présentation du produit

Caractéristiques du produit

Élément	Valeur
niveau de montage	avant et arrière
modèle	avec cadre fixe
finition de la barre profilée	en forme de L
nombre de portes	1
type d'aération	passif
largeur	570 mm

Excel WR 6U 400 mm Deep - Grey

Référence du produit: WB6.4SG

sales@excel-networking.com
excel-networking.com

hauteur	368 mm
profondeur	400 mm
dimension (modulaire)	482,6 mm (19 pouces)
nombre d'unités en hauteur (HE)	6
capacité de charge max.	60 kg
avec tôle de toit	oui
avec mise à la terre	non
avec porte frontale	oui
avec parois latérales	oui
démontable	non
matériau	acier
finition de la surface	revêtement par poudre
couleur	gris
numéro RAL	9002
indice de protection (IP)	IP20

Spécifications supplémentaires


Caractéristiques	Valeur
------------------	--------

Excel WR 6U 400 mm Deep - Grey


Référence du produit: WB6.4SG

sales@excel-networking.com
excel-networking.com

Dessin de produit

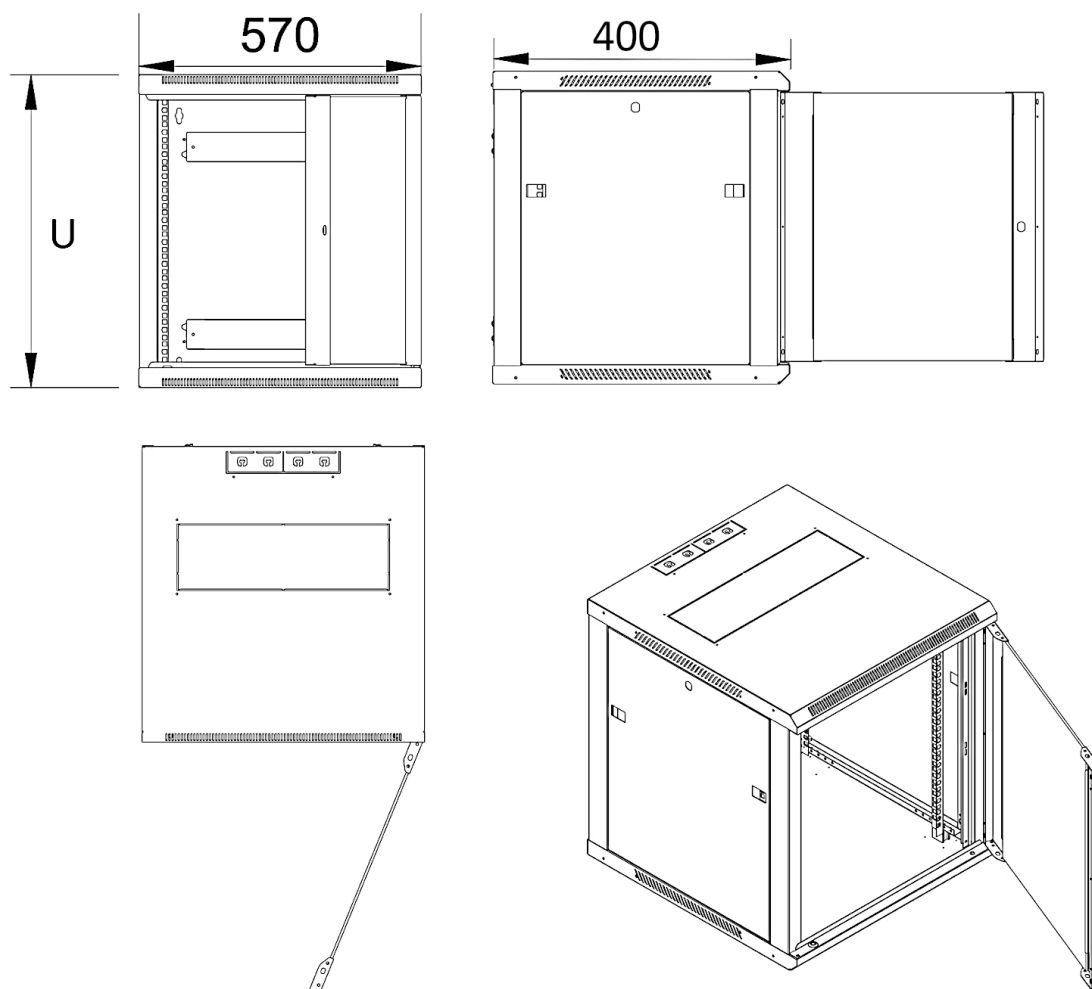


Vue éclatée

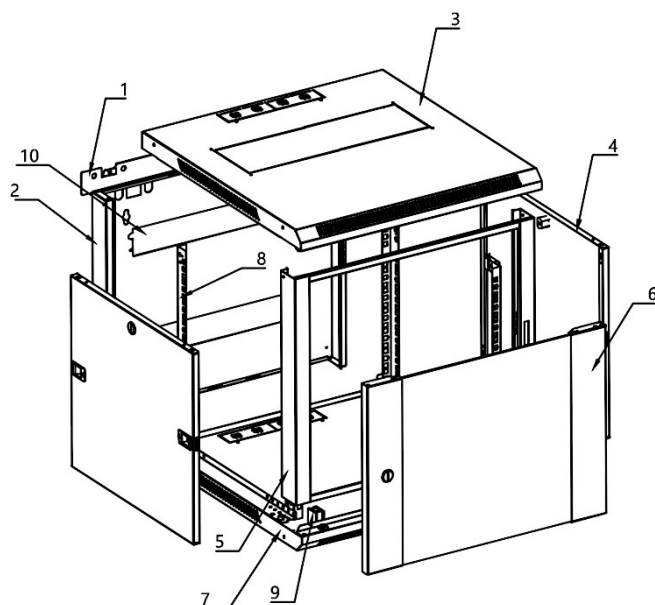

- 1) Mounting Bracket
- 2) Back Panel
- 3) Roof Panel
- 4) Side Panel
- 5) Front Post Frame
- 6) Front Door
- 7) Bottom Panel
- 8) 19" Mounting Rails
- 9) Bottom support block
- 10) Cable Covers x 2

Profile Positions

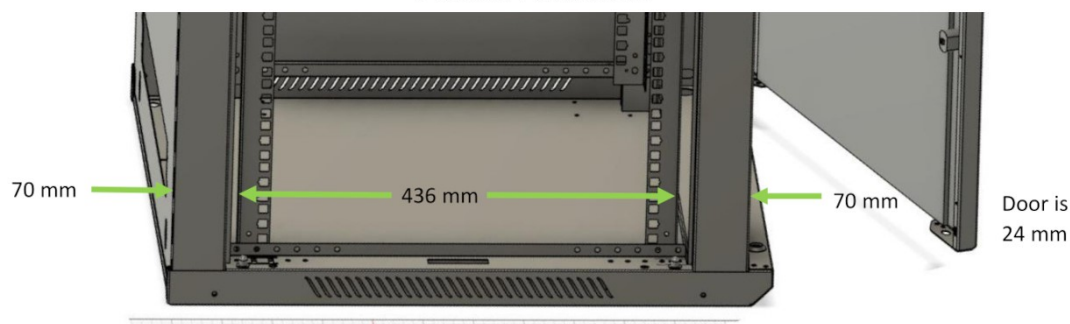

600mm Wall Box, pitch between profiles is **436mm is default pitch**, maximum is 456mm.

500mm Wall Box, pitch between profiles is **336mm is default pitch**, maximum is 356mm

400mm Wall Box, pitch between profiles is **236mm in default pitch**, maximum is 256mm

On 600mm Deep wall box, if rear profiles are moved forward by one position, that will give correct pitch from front profile to side holes which is 386mm, can use 542-021 or 542-026.

500mm Deep wall Boxes will not accept the 400mm Cantilever Shelf, use 542-022 fixed shelf.

For 400mm Deep Wall Boxes, only option is the small shelf 542-020.

Excel WR 6U 400 mm Deep - Grey

Référence du produit: WB6.4SG

sales@excel-networking.com
excel-networking.com

Images du produit



Quality Glass Door with Lock



Quick Release Side Panels



Mounting Bracket and cable Entry



19" Profiles front and back




Side Panels Lockable with key



Roof Fan Tray opening and cable entry



Quality Finished Wall Box fully painted

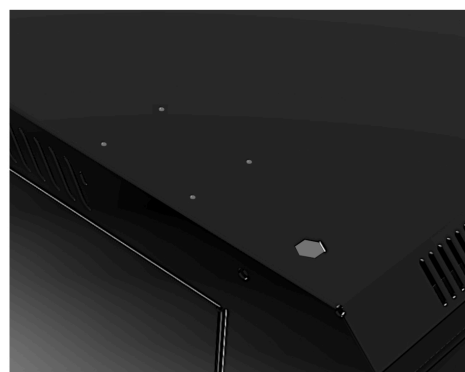

Mounting holes in base for jacking feet or castors

Normes applicables

Norme	Détails
BS EN 60297-3-100:2009	Structures mécaniques pour équipement électronique. Dimension de structures mécaniques des séries 482,6 mm (19 po) Dimensions de base des panneaux avant, sous-baies, châssis, baies et armoires
BS 3193:2008	Spécifications pour panneaux en verre trempé thermiquement pour usage dans les applications résidentielles
IEC 62262: 2002	Degrés de protection fournis par les coffrets pour é quipements électriques contre les impacts mécaniques externes (code IK)
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Informations concernant les références produits

Référence du produit	Description
WB12.4SGB	
WB6.4SG	
WB6.4SGB	
WB9.4SGB	
WBFP12.4SGB	
WBFP6.4SG	
WBFP6.4SGB	
WBFP9.4SGB	