

Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 305 m Box Red

Item Code: 100-097

excel
without compromise.



Cat6 solid copper cable

U/UTP no overall screening

No conductor screening

Outer sheath colour: red

Reaction-to-fire class according to EN 13501-6: Dca

Smoke development class according to EN 13501-6: s2

CIBSE TM65 Embodied Carbon: 82.909 kg CO2e

Product Overview

Excel solid Cat6 ethernet cable U/UTP LSOH CPR Euroclass Dca manufactured and tested to the TIA/EIA 568-B.2-1, EN50173-1 and ISO/ IEC 11801 Cat6 specifications, 305 m or 500 m. Each cable consists of 8 colour coded solid copper conductors twisted together to form four pairs.

These are then formed around a central X-shaped polyethylene centre with the whole cable produced in a LSOH sheath.

Product Specifications

Feature	Values
Conductor surface	Bare
AWG size	23
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Specification core insulation	Polyethylene (PE)

Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 305 m Box Red

Item Code: 100-097




Core identification	Colour
Overall screening	None
Conductor screening	None
Outer sheath material	Copolymer, thermoplastic (LSOH)
Outer sheath colour	Red
Flame retardant according to IEC 60332-1-2	yes
Reaction-to-fire class according to EN 13501-6	Dca
Smoke development class according to EN 13501-6	s2
Euro class flaming droplets/particles according to EN 13501-6	d2
Euro class acidity according to EN 13501-6	a1
Outer diameter approx.	6.2 mm
Installation Temperature Range	0...60 °C
Operating Temperature Range	-20...75 °C
Category	6
NVP value	69 %

Cable specifications

Features	Values
Maximum pulling load	100 N
MBR during installation	8x cable OD
MBR installed	4x cable OD

Cross-section diagram

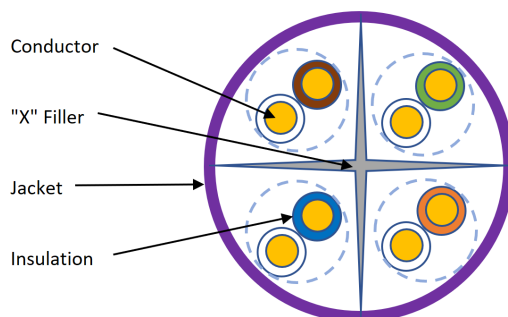

Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2020	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2018	Information technology. Generic cabling systems - Office premises
BS EN 50288-3-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unshielded cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004 + A12:2020	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-D:2015	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2014	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH)

	measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Part Number Table

Part Number	Description
100-071	Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 305 m Box Violet
100-071-1000M	Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 1000 m Reel Violet
100-071-500M	Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 500 m Reel Violet
100-072	Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 305 m Box Green
100-074	Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 305 m Box White
100-074-1000M	Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 1000 m Reel White
100-074-500M	Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 500 m Reel White
100-075	Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 305 m Box Orange

Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass
Dca 305 m Box Red

Item Code: 100-097



100-078	Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 305 m Box Black
100-097	Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 305 m Box Red
100-098	Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 305 m Box Blue
100-099	Excel Solid Cat6 Cable U/UTP LSOH CPR Euroclass Dca 305 m Box Yellow
100-103	Excel Solid Cat6 Dual Cable U/UTP LSOH CPR Euroclass Dca 500 m Reel White

Excel is a world class premium performing end to end infrastructure solution designed,
Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.