Item Code: 100-180











- X High quality die cast housing
- X Toolless termination design
- X Suitable for patch panel and faceplate mounting
- X Supports 10 Gigabit Ethernet application
- x 360 degree Shielding protects against alien crosstalk
- Ideal for installation in 37 mm deep back box with bevelled faceplate
- X CIBSE TM65 Embodied Carbon: 0.529 kg CO2e

Product Overview

100-180 Excel Cat6a FTP Screened Keystone Jack Toolless Silver, available as part of our range of excel cat6a keystone jacks for RJ45 network connections.

A toolless termination RJ45 socket suitable for mounting in a range of housings from patch panels, faceplates and shutters to sub-floor boxes and distribution enclosures. The socket is manufactured in a high quality zinc die cast housing, with butterfly style Toolless IDC termination points.

Product Specifications

| Feature | Values |
|---------------------------|-----------|
| Model | Jack |
| Type of connector | RJ45 8(8) |
| Shielded | yes |
| Category | 6A (IEC) |
| Requires termination tool | no |
| Suitable for round cable | yes |
| Suitable for flat cable | no |

Item Code: 100-180



| Suitable for solid core | yes |
|-------------------------|--------|
| Colour | Silver |
| AWG-range | 2226 |


Additional specifications


| Features | Values |
|----------------------|---|
| Width | 17mm |
| Depth | 41.15mm |
| Height | 26mm |
| Housing | Die cast Zinc-alloy |
| RJ45 Contacts | Nickel plated phosphor bronze alloy with 50 micro-inch Gold plating |
| IDC Contacts | Tin plated phosphor bronze alloy |
| RJ45 Life | Minimum 750 insertions |
| Storage temprature | -40 to +70°C |
| Operating temprature | -10 to +60°C |


Item Code: 100-180



Product drawing





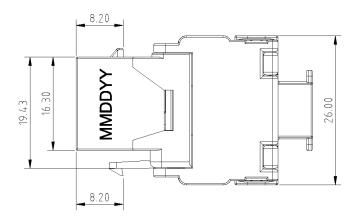

Included accessories

| Accessories | Singles | 24-packs |
|-----------------|---------|----------|
| Nylon cable tie | 1 | 24 |
| Wiring cap | 1 | 24 |

Standards

| Applicable standard | Detail |
|--|---|
| RoHS-II/-III (2011/65/EU & 2015/863): 2023 | Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III). |
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |

Item Code: 100-180



| EN 50173-1:2018 | Information technology. Generic cabling systems - General requirements |
|------------------------|--|
| ANSI/TIA 568-2.D | Balanced Twisted-Pair Telecommunications Cabling and Components Standards |
| UL-94-V-0 | Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. NO flaming drips are allowed. |
| WFD: 2023 | Compliant to Waste Framework Directive |
| SCIP: 2023 | Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products) |
| POPs (EU) No 2019/1021 | EU Regulation for the restriction of Persistent Organic Pollutants. |

Part Number Table

| Part Number | Description |
|-------------|---|
| 100-180 | Excel Cat6A FTP Screened Keystone Jack Toolless Silver |
| 100-180-24 | Excel Cat6A FTP Screened Keystone Jack Toolless Silver (Box 24) |

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

