


Excel Category 6A Cable U/FTP S-Foil Dca LS0H 305m Box - Ice Blue

Item Code: 100-191-305M

excel
without compromise.

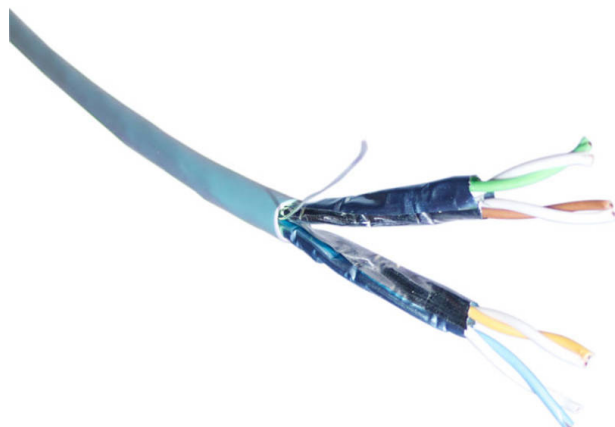

✕ "S" foil screen

✕ Specified to 500MHz

✕ Choice of reel size

✕ Sequential metre markings

✕ Suitable for 10 Gigabit Ethernet applications

✕ Euroclass Dca-s2-d2-a1

Product Overview

Excel Category 6A Screened (U/FTP) Cable takes the performance capabilities of copper infrastructure to new levels. The cable has been designed to exceed the ISO/IEC, TIA and CENELEC for Category 6A/Augmented Category 6 component requirements. This delivers Class EA/ Augmented Category 6 link performance over distances of up to 90 metres which supports the applications including 10GBASE-T, 10 Gigabit Ethernet.

Each cable consists of two sets of two pairs are wrapped together in an "S" configuration with high quality, strong, aluminium/polyester foil tape providing screening for each pair. The ""S"" Foil configuration ensures separation of the pairs that ensures the performance. The individual pairs are set to different lay lengths to ensure optimum performance.

The print legend on the cable now includes information regarding the DOP number, Test and Classification of the cable for traceability.

Product Specifications

Feature	Values
Category	6A (IEC)
Overall screening	None
Conductor screening	Foil
Outer sheath colour	Ice Blue
Reaction-to-fire class according to EN 13501-6	Dca
Smoke development class according to EN 13501-6	s2
Euro class flaming droplets/particles according to EN	d2

Excel Category 6A Cable U/FTP S-Foil Dca LS0H 305m Box - Ice Blue


Item Code: 100-191-305M

excel
without compromise.

13501-6

Euro class acidity according to EN 13501-6	a1
AWG-size	23
Specification core insulation	PE
Core identification	Colour
Outer sheath material	Copolymer
Flame retardant	In accordance with EN 60332-1-2 and EN 50399
Outer diameter approx.	6.7 mm
Installation Temperature Range	0...60 °C
Operating Temperature Range	-20...60 °C
NVP value	78 %
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Conductor surface	Bare

Cross-section diagram

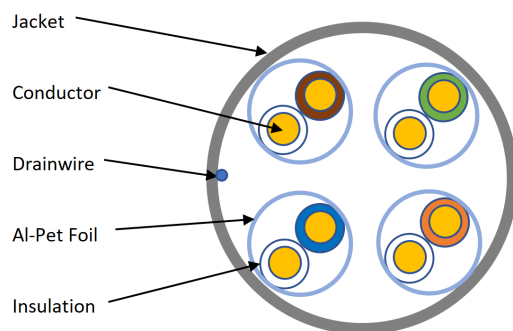

Cable specifications

Features	Values
Dielectric strength	2.5kV for 2s
Maximum Pulling Load	60N/6.1KgF
MBR during installation	8x cable OD
MBR installed	4x cable OD

Excel Category 6A Cable U/FTP S-Foil Dca LS0H 305m Box - Ice Blue

Item Code: 100-191-305M



Impedance (Ω)	100 \pm 15
Conductor resistance (Ω /100m)	\leq 9.5
DC resistance unbalance (%)	\leq 4
Pair-to-ground capacitance unbalance (pF/km)	\leq 1600
Insulation resistance	>5000

Performance parameters

Freq. (MHz)	Ins. Loss (dB / 100m) Max.	RL (dB) Min.	NEXT (dB / 100m) Min.	ACR-F (dB / 100m) Min.	PS NEXT (dB / 100m) Min.	PS ACR-F (dB / 100m) Min.	Delay Skew (ns / 100m) Max.	Prop. Delay (ns / 100m) Max.
1	-	20	-	-	-	-	-	-
4	3.8	23	66.3	56	63.3	53	45	552
10	5.9	25	60.3	48	57.3	45	45	545.4
16	7.5	25	57.2	43.9	54.2	40.9	45	543
20	8.4	25	55.8	42	52.8	39	45	542
31.25	10.5	24.3	52.9	38.1	49.9	35.1	45	540.4
62.5	15	23.6	48.4	32.1	45.4	29.1	45	538.6
100	19.1	21.5	45.3	28	42.3	25	45	537.6
200	27.6	18	40.8	22.2	37.8	19	45	536.5
250	31.1	17.3	39.3	20	36.6	17	45	536.3
300	34.3	17.3	38.1	18.5	35.1	15.5	45	536.1
400	40.1	17.3	36.3	16	33.3	13	45	535.8
500	45.3	17.3	34.8	14	31.8	11	45	535.6

Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2011	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
BS EN 50288-6-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-1:2004	Tests on electric and optical fibre cables under fire conditions - Part 1-1: Test for vertical flame propagation for a single insulated wire or cable - Apparatus
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2011	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-1:2005	Measurement of smoke density of cables burning under defined conditions - Part 1: Test apparatus
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
RoHS	Restriction of Hazardous Substances - Compliant

Excel Category 6A Cable U/FTP S-Foil Dca LS0H
305m Box - Ice Blue

Item Code: 100-191-305M



Part Number Table

Part Number	Description
100-191-305M	Excel Category 6A Cable U/FTP S-Foil Dca LS0H 305m Box - Ice Blue

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.