Excel Plus Cat5e 24 Port Unscreened Patch Panel 1U LSA Punch Down Black

Part Code: 100-470

sales@excel-networking.com
excel-networking.com

CIBSE TM65 Embodied Carbon: 13.981 kg CO2e



Main Features

- Category 5e
- LSA style termination blocks, T568A/B wiring configuration
- Power sum compliant
- Supports gigabit ethernet
- Pre printed 1□96 self adhesive labelling included
- 25 Year system warranty

Product Overview

Excel Plus Category 5e Patch Panels comply with the currrent standards for enhanced Category 5. Each panel consists of a number of 8 way blocks of RJ45 sockets, housed in a high quality plastic moulding. To the front of the panel this moulding contains the new easy to use slide label system.

Each block of 8 sockets has its own label which can be removed from either side of the covered label field. The label strip itself is protected by a clear, tough plastic insert. Ease of installation is assured with ample rear cable management positions and LSA IDC blocks. A choice of port configurations - 24 Ports in 1U or 48 Ports in 2U – is available to suit all applications. Cage nuts and mini cable ties are included with each panel.

This data sheet was generated at 3:11am 17th November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

Product Specifications

Feature	Values
Number of ports – loaded	**24**
Type of connector	**RJ45 8(8)**
Shielded	**no**
Category	**5E**
Connection type	**LSA**
Number of rack units (RU)	**1**
Colour	**Black**
Mounting method	**482.6 mm (19 inch) mounting**
Height	**44 mm**
Width	**480 mm**
Depth	**28.4 mm**


Additional specifications

Features	Values
Wiring Specification	**T568B**
RJ45 Jack Min life expectancy	**750 insertions**
RJ45 Jack contact	**50 microinch gold over 100 microinch nickel undercoat**
IDC Contacts Max life expectancy	**200 terminations**
Contact compatibility	**22 to 26AWG**
Operating Temperature Range	**-10°C to 60°C**
Storage Temperature Range	**-40°C to 68°C**

This data sheet was generated at 3:11am 17th November 2026 and is subject to change at any time.

Relative Humidity	**10% to 90%**
Panel material	**SPCC**
Frame material	**ABS**
Jack housing material	**PC**
IDC material	**phosphor bronze, tin over nickel undercoat**

Product drawing

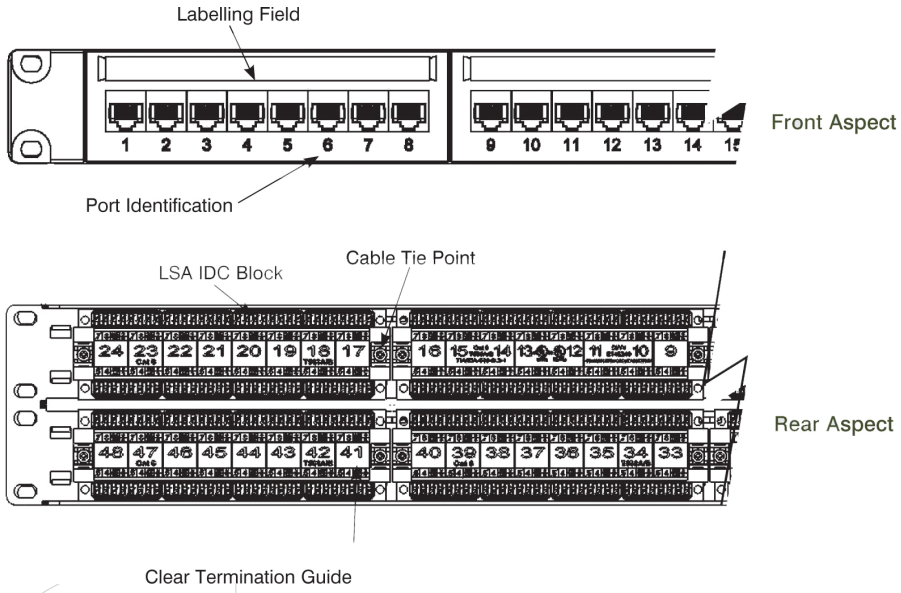

Standards

Applicable standard	Detail
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz -

This data sheet was generated at 3:11am 17th November 2026 and is subject to change at any time.

	Horizontal floor wiring - Sectional specification
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
ANSI/EIA-310-E	Electronic Industries Association standard for horizontal spacing, vertical hole spacing, rack opening and front panel width
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

This data sheet was generated at 3:11am 17th November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

Part Code Table

Part Code	Description
100-470	**Excel Plus Cat5e 24 Port Unscreened Patch Panel 1U LSA Punch Down Black**
100-480	**Excel Plus Cat5e 48 Port Unscreened Patch Panel 2U LSA Punch Down Black**

This data sheet was generated at 3:11am 17th November 2026 and is subject to change at any time.