
Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 2 m Grey

Part Code: 100-501

sales@excel-networking.com
excel-networking.com

CIBSE TM65 Embodied Carbon: 0.493 kg CO2e

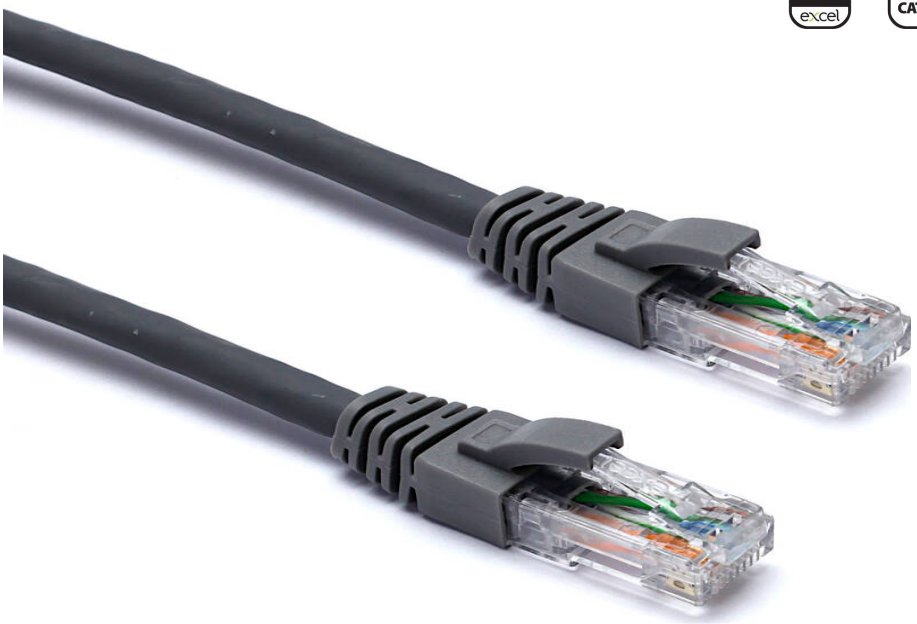

Main Features

/ Cat6A compliant

/ Suitable for 10 Gigabit ethernet application

/ Blade style 'slimline' moulded strain relief boot with clip protector

/ Specified to 500 MHz

/ EC verified

/ CIBSE TM65 Embodied Carbon: 0.493 kg CO2e

Product Overview

Excel Category 6A (Augmented Category 6) patch leads consist of 4 twisted pairs of 26 AWG stranded copper wires. These pairs are then cabled together, with different lay lengths to ensure optimum performance.

Staggered pin RJ45 plugs terminate the cable, and each lead is fitted with colour coded slimline moulded boots, suitable for use in high density router or switch blades.

Product Specifications

This data sheet was generated at 10:32pm 15th November 2026 and is subject to change at any time.

Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 2 m Grey

Part Code: 100-501


sales@excel-networking.com
excel-networking.com

Feature	Values
Cable type	**U/UTP**
Category	**6A (IEC)**
Length	**2 m**
Type of connector connection 1	**RJ45 8(8)**
Type of connector connection 2	**RJ45 8(8)**
Outer sheath colour	**Grey**
Strain relief boot	**Moulded-on**
Lockable	**no**
Strain relief boot colour	**Grey**
Flame retardant version	**yes**
Cable construction	**1x4**
AWG-size	**26**
Pin assignment	**1:1**

This data sheet was generated at 10:32pm 15th November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

Product drawing

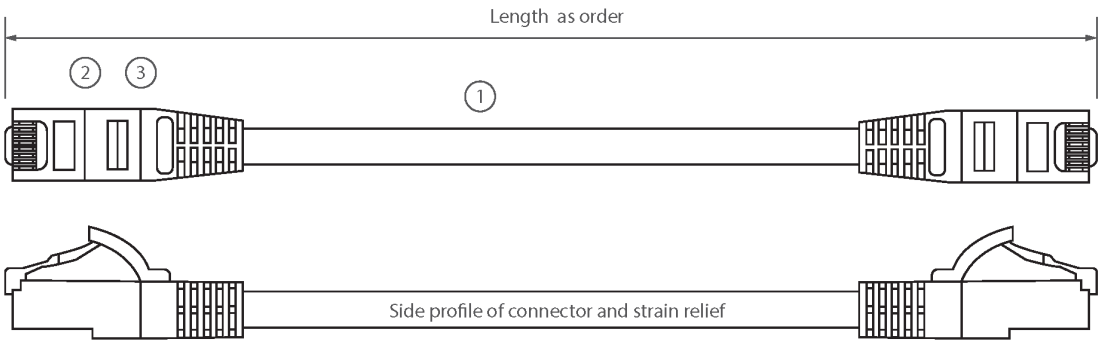

1. 4 pair individually unscreened LS0H cable
2. RJ45 connector with 50µm gold plated staggered pins
3. Slimline blade style strain relief boot

Standards

Applicable standard	Detail
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under

This data sheet was generated at 10:32pm 15th November 2026 and is subject to change at any time.

	defined conditions – Part 2: Test procedure and requirements
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Part Code Table

Part Code	Description
100-500	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 1 m Grey**
100-501	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 2 m Grey**
100-502	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 3 m Grey**
100-503	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 5 m Grey**
100-509	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 1 m Blue**

This data sheet was generated at 10:32pm 15th November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

100-510	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 2 m Blue**
100-511	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 3 m Blue**
100-512	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 5 m Blue**
100-519	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 1 m Red**
100-520	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 2 m Red**
100-521	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 3 m Red**
100-522	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 5 m Red**
100-529	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 1 m Yellow**
100-530	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 2 m Yellow**
100-531	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 3 m Yellow**
100-532	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 5 m Yellow**
100-539	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 1 m Green**
100-540	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 2 m Green**
100-541	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 3 m Green**
100-542	**Excel Cat6A Patch Lead U/UTP Unshielded LSOH Blade Booted 5 m Green**

This data sheet was generated at 10:32pm 15th November 2026 and is subject to change at any time.