

Excel Enbeam 24 Way SC Simplex/LC Duplex Fibre Optic Panel Empty

Part Code: 200-952

sales@excel-networking.com
excel-networking.com



Main Features

- / Multimode and singlemode
- / Management and fixing kit included
- / Port identification numbers
- / Choice of port density
- / Upto 24 duplex adaptors per patch panel
- / Multiple cable entry to rear

Product Overview

The Excel range of SC patch panels are sliding drawer "tray style" housings suitable for either direct termination or splicing of up to 48 fibres in 1U of rack space. Each panel is manufactured from high quality 2 mm thick steel powder coat finish to provide a strong and durable unit.

To the front of the patch panel the specified number of duplex adaptors are loaded from left to right. Each panel utilises colour coded adaptors, beige, aqua and violet for multimode, blue for singlemode and green for SM APC. Each duplex adaptor accommodates two terminated fibres.

Each panel has included within it a set of fixing brackets, and a cable management pack which includes cable entry glands, cable ties, and a 24 way splice bridge.

Excel Enbeam 24 Way SC Simplex/LC Duplex Fibre Optic Panel Empty

Part Code: 200-952

sales@excel-networking.com
excel-networking.com

Note that SC panels can be assembled to order using a combination of adaptors, pigtails and splice cassettes - call to enquire.

Product Specifications

Feature	Values
Suitable for number of fibre cores	48
Suitable for number of module inserts	24
With pigtails	no
APC-type	no
Type of connector external	LC-Duplex
Type of connector interior	LC-Duplex
Colour	Black
RAL-number	9005
Mounting method	482.6 mm (19 inch) mounting
Number of rack units (RU)	1
Height	43.5 mm
Width	483 mm
Depth	219.5 mm

Additional specifications

Feature	Value
Operating Temperature	-40 to +80 °C
IP Rating	IP20
Cable Entry 20mm	2

Excel Enbeam 24 Way SC Simplex/LC Duplex Fibre Optic Panel Empty

Part Code: 200-952

sales@excel-networking.com
excel-networking.com

Cable Entry 25mm	2
Material	Cold rolled steel
Material Thickness	2mm
Material Coating	Powder Coating
RoHs Compliant Adaptor	Yes
Designed in accordance with	ISO/IEC 11801, IEC60304, IEC61754, TIA/EIA 568.D

Included accessories

Accessories	Quantity
Cable Gland (PG 13.5)	1
Cable Gland (PG 19)	1
Nylon cable tie	7
Adjustable cable tie	4
24 Position splice holder	2
Mounting twist tie	4
Cage nuts and screws	1pk

Excel Enbeam 24 Way SC Simplex/LC Duplex Fibre Optic Panel Empty



Part Code: 200-952

sales@excel-networking.com
excel-networking.com


Product drawings



Excel Enbeam 24 Way SC Simplex/LC Duplex Fibre Optic Panel Empty

Part Code: 200-952

sales@excel-networking.com
excel-networking.com

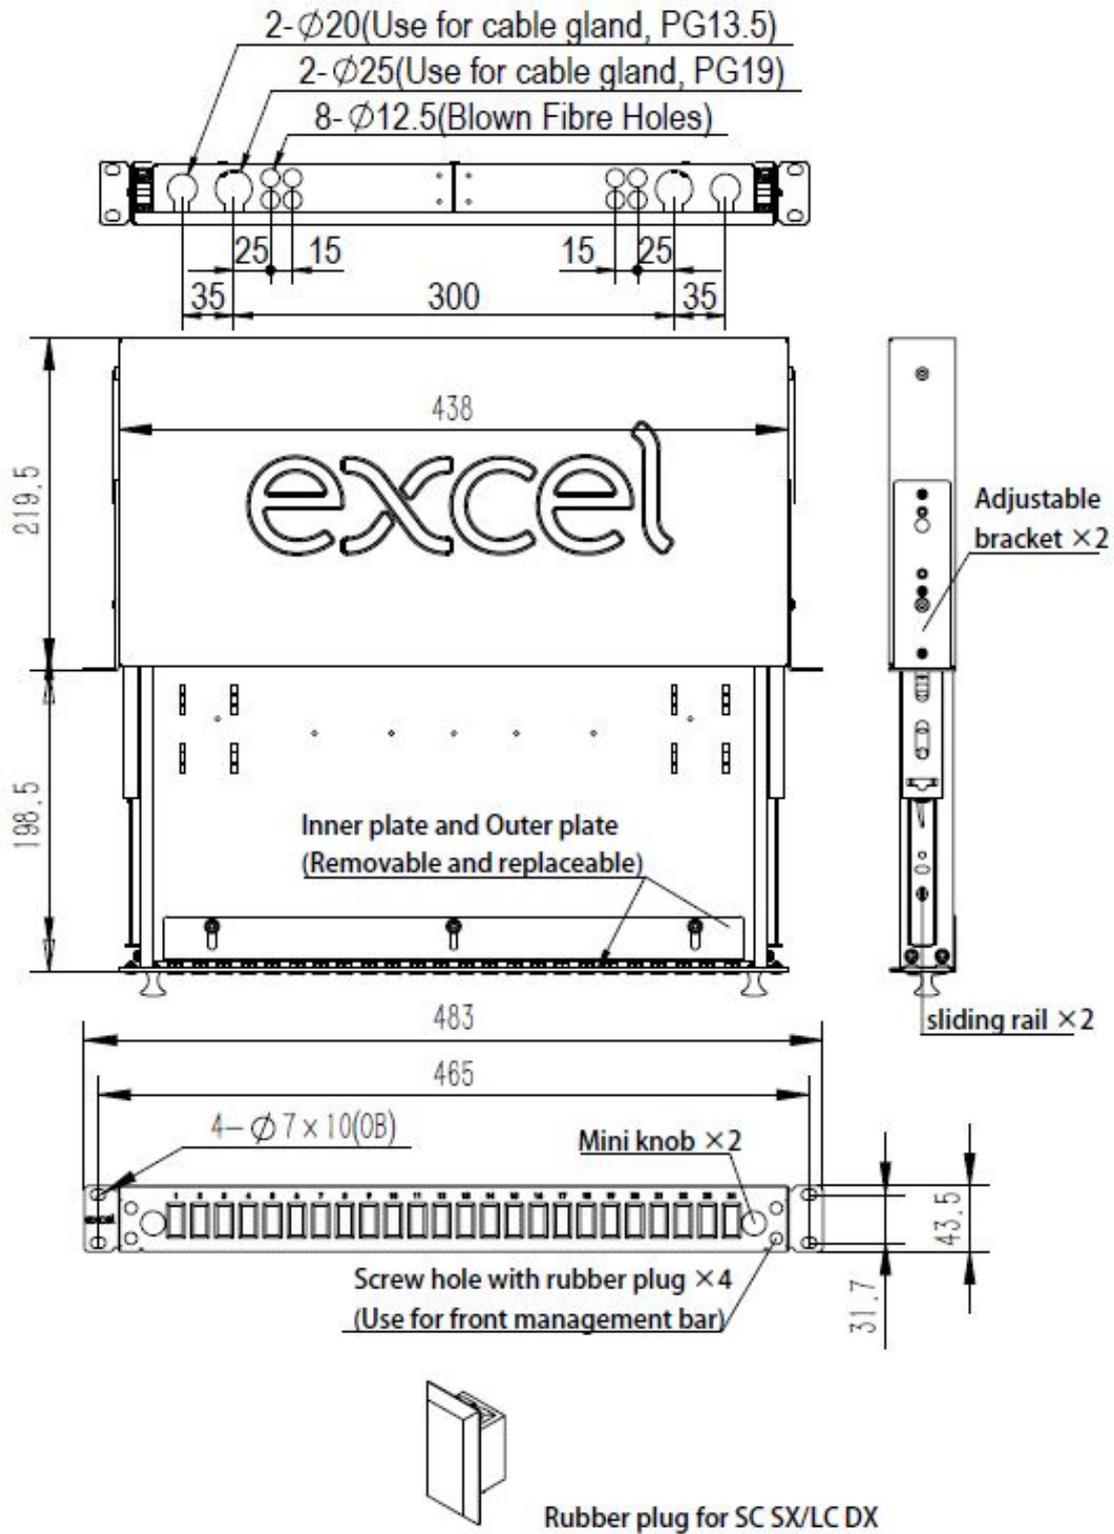

Part Code: 200-952

sales@excel-networking.com
excel-networking.com

Standards

Applicable standard	Detail
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Part Code Table

Part Code	Description
200-952	Excel Enbeam 24 Way SC Simplex/LC Duplex Fibre Optic Panel Empty