
## Excel Screened Multicore Cable 2 Core 7x0.2 Per Metre

Item Code: 7202C



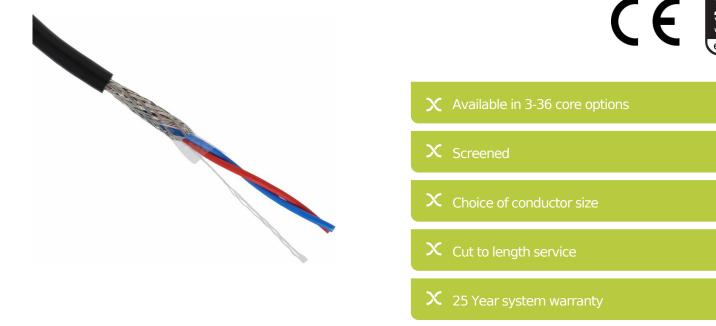

#### **Product Overview**

Excel multicore 7/0.2 screened cables are manufactured in accordance with the Defence Standard 61-12, part 4 specifications. They should not be used for direct connection of equipment to mains power supplies, but are ideal for the interconnection of electronic equipment and instruments.

X Euroclass Eca

The print legend on the cable now includes information regarding the DOP number, Test and Classification of the cable for traceability.

## **Product Specifications**

Feature	Values
Conductor surface	Tinned
Diameter of conductor	0.2 mm
AWG size	24
Conductor category	Class 2 = stranded
Total number of cores	2
Stranding element	Cores
Core insulation	Polyvinyl chloride (PVC)
Core identification	Rings
Overall screening	Braiding
Outer sheath material	Polyvinyl chloride (PVC)

# Excel Screened Multicore Cable 2 Core 7x0.2 Per Metre

Item Code: 7202C



Outer sheath colour	Black
Flame retardant according to IEC 60332-1-2	yes
Outer diameter approx.	3.8 mm
Operating Temperature Range	080 °C
Category	Multicore

### **Part Number Table**

Part Number	Description
7202C	Excel Screened Multicore Cable 2 Core 7x0.2 Per Metre
7204C	Excel Screened Multicore Cable 4 Core 7x0.2 Per Metre
7206C	Excel Screened Multicore Cable 6 Core 7x0.2 Per Metre
7208C	Excel Screened Multicore Cable 8 Core 7x0.2 Per Metre
7212C	Excel Screened Multicore Cable 12 Core 7x0.2 Per Metre

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.



Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.