Item Code: BBS001MPLBU









- X Cat5e compliant
- X Foil tape screen with LSOH outer sheath
- X Independently verified, T568B wiring
- X Supports Gigabit ethernet
- X Choice of colours, individually packaged
- Blade style 'slimline' moulded strain relief boot with clip protector
- X CIBSE TM65 Embodied Carbon: 0.246 kg CO2e

Product Overview

Excel Category 5e F/UTP Patch Leads are manufactured and tested to ISO11801 Category 5e and EIA/TIA 568 standards.

Each cable consists of 8 colour coded stranded conductors twisted together to form 4 pairs with varying lay lengths. Cables are fitted with plastic strain relief boots, for applications that may require continuous patching or a degree of stress relief applied.

Product Specifications


| Feature | Values |
|--------------------------------|------------|
| Cable type | F/UTP |
| Category | 5E |
| Length | 1 m |
| Type of connector connection 1 | RJ45 8(8) |
| Type of connector connection 2 | RJ45 8(8) |
| Outer sheath colour | Blue |
| Strain relief boot | Moulded-on |
| Lockable | no |
| Strain relief boot colour | Blue |

Item Code: BBS001MPLBU



| Flame retardant version | yes |
|-------------------------|-----|
| Cable construction | 1x4 |
| AWG-size | 26 |
| Pin assignment | 1:1 |

Product drawing

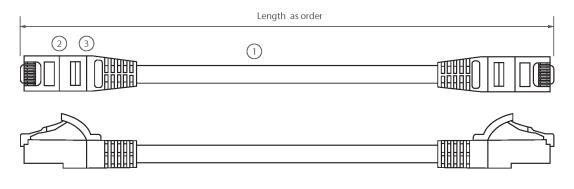

- 1 4 pair individually foil screen LS0H cable
- \bigcirc RJ45 connector with 50 μ m gold plated staggered pins
- (3) Slimline blade style strain relief boot

Standards

| Applicable standard | Detail |
|--------------------------------|--|
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| EN 50173-1:2018 | Information technology. Generic cabling systems - General requirements |
| ANSI/TIA 568-2.D | Balanced Twisted-Pair Telecommunications Cabling and Components Standards |
| IEC 61156-5:2009+AMD1:2012 CSV | Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification |
| IEC 60332-1-2:2004 | Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for $1\mathrm{kW}$ pre-mixed flame |

Item Code: BBS001MPLBU



| EN 50399:2011+A1:2016 | Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results |
|--|--|
| IEC 61034-2:2005+A1:2013 | Measurement of smoke density of cables burning under defined conditions – Part 2: Test procedure and requirements |
| RoHS-II/-III (2011/65/EU & 2015/863): 2023 | Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III). |
| WFD: 2023 | Compliant to Waste Framework Directive |
| SCIP: 2023 | Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products) |
| POPs (EU) No 2019/1021 | EU Regulation for the restriction of Persistent Organic Pollutants. |

Part Number Table

| Part Number | Description |
|-------------|--|
| BBS0.2MPLGE | Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 0.2 m Grey |
| BBS0.5MPLGE | Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 0.5 m Grey |
| BBS001MPLBU | Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 1 m Blue |
| BBS001MPLGE | Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted $1\ \mathrm{m}$ Grey |
| BBS001MPLGN | Excel Cat5e Patch Lead F/UTP Shielded LS0H Blade Booted 1m Green |
| BBS001MPLRD | Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted $1\ \mathrm{m}$ Red |
| BBS002MPLGE | Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 2 m Grey |
| BBS003MPLBU | Excel Cat5e Patch Lead F/UTP Shielded LS0H Blade Booted 3m Blue |
| BBS003MPLGE | Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 3 m Grey |
| BBS003MPLGN | Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 3 m Green |
| BBS003MPLRD | Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 3 m Red |
| BBS003MPLYW | Excel Cat5e Patch Lead F/UTP Shielded LS0H Blade Booted 3m Yellow |
| BBS005MPLGE | Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 5 m Grey |
| BBS007MPLGE | Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 7 m Grey |
| BBS010MPLGE | Excel Cat5e Patch Lead F/UTP Shielded LS0H Blade Booted 10 m Grey |
| BBS150MPLGE | Excel Cat5e Patch Lead F/UTP Shielded LSOH Blade Booted 15m Grey |
| | |

Item Code: BBS001MPLBU



Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.



Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.